


수정 내용			
수정	설명	날짜	승인

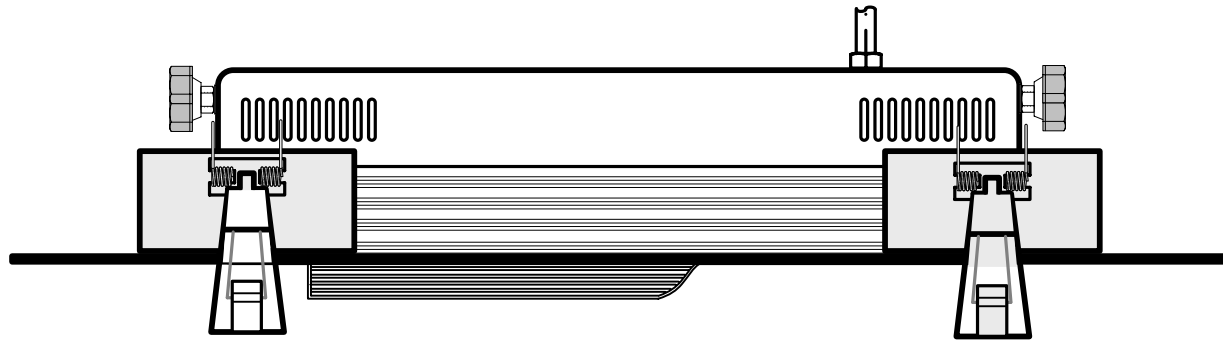

SPEC

- 1) Voltage : 230~240V
- 2) Wattage : 2000W
- 3) Lamp Color Temperature (Coated) : 1600 ± 200K
- 4) Total Weight : 8Kg

WORKING CONDITION

- 1) Burning Position : Within Horizontal ±5°
- 2) Burning Cycle : Continuous or Intermittent
- 3) Burning Voltage : 230~240V ± 10%
- 4) Frequency : 50/60 Hz



LIFE

- 1) Life time : 5,000 hour (Normal Condition)

NO	ITEM	MATERIAL	Q`TY	SPEC
1	Body	Aluminum	1	t=2.0
2	Bracket	SPCC	1	t=2.0
3	Lamp	Quartz	1	230V 2000W
4	Refector	Aluminum	1	T=0.5
5	Safety grill	SS	1	Φ 1.55 Cr Plating
6	Cable socket	Plug type	1	230V 16A 1.5mm ² (3m) H07RN-F, H05VV-F
7	Fix prop	SPCC	1	t=3.0

TITLE : SMART BH 2000-F				NO	DESCRIPTION	MAT`L	FINISH	Q`TY	REMARK
THIRD ANGLE		UNIT : mm		도면등록 NO		도면에 지정되지 않은 일반공차			
PROJECTION		SCALE : FREE		HAD-AQ-142		C급	B급	A급	급수
DRAWN	DESIGNED	CHECKED	APPROVED	품번		±0.05	±0.10	±0.05	1~4 mm 미만
						±0.35	±0.20	±0.07	4~16
						±0.50	±0.30	±0.10	16~23
						±0.90	±0.55	±0.16	63~250
HANA		HANA HALOGEN CO.,LTD		개정차수		±1.50	±0.90	±0.30	250~500
				0		±2.50	±1.50	±0.50	500~1000

수정 내용			
수정	설명	날짜	승인

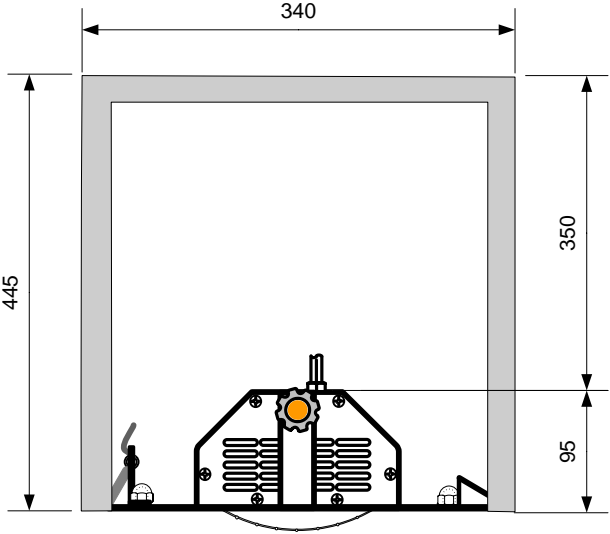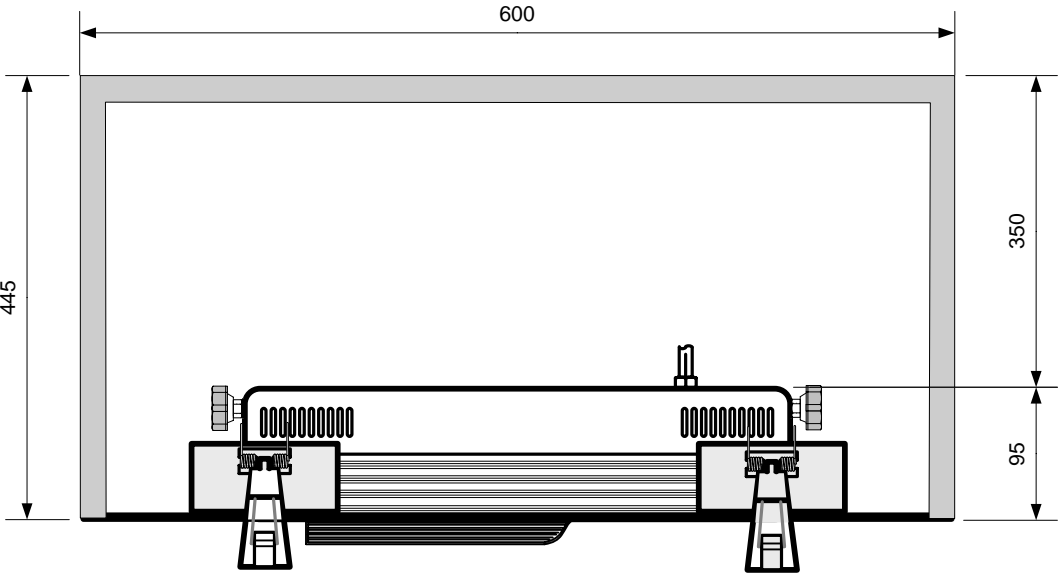

TITLE : SMART BH 2000-F				NO	DESCRIPTION	MAT'L	FINISH	Q'TY	REMARK
THIRD ANGLE		UNIT : mm							
PROJECTION		SCALE : FREE		도면등록 NO HAD-AQ-142		도면에 지정되지 않은 일반公差			
DRAWN	DESIGNED	CHECKED	APPROVED			C급	B급	A급	급수
				품번		±0.05	±0.10	±0.05	1~4 mm 미만
						±0.35	±0.20	±0.07	4~16
						±0.50	±0.30	±0.10	16~23
						±0.90	±0.55	±0.16	63~250
<div>HANA</div> <div>HANA HALOGEN CO.,LTD</div>				개정 차수 0		±1.50	±0.90	±0.30	250~500
						±2.50	±1.50	±0.50	500~1000

TITLE : SMART FRAME

