


SMART TOWER 3000

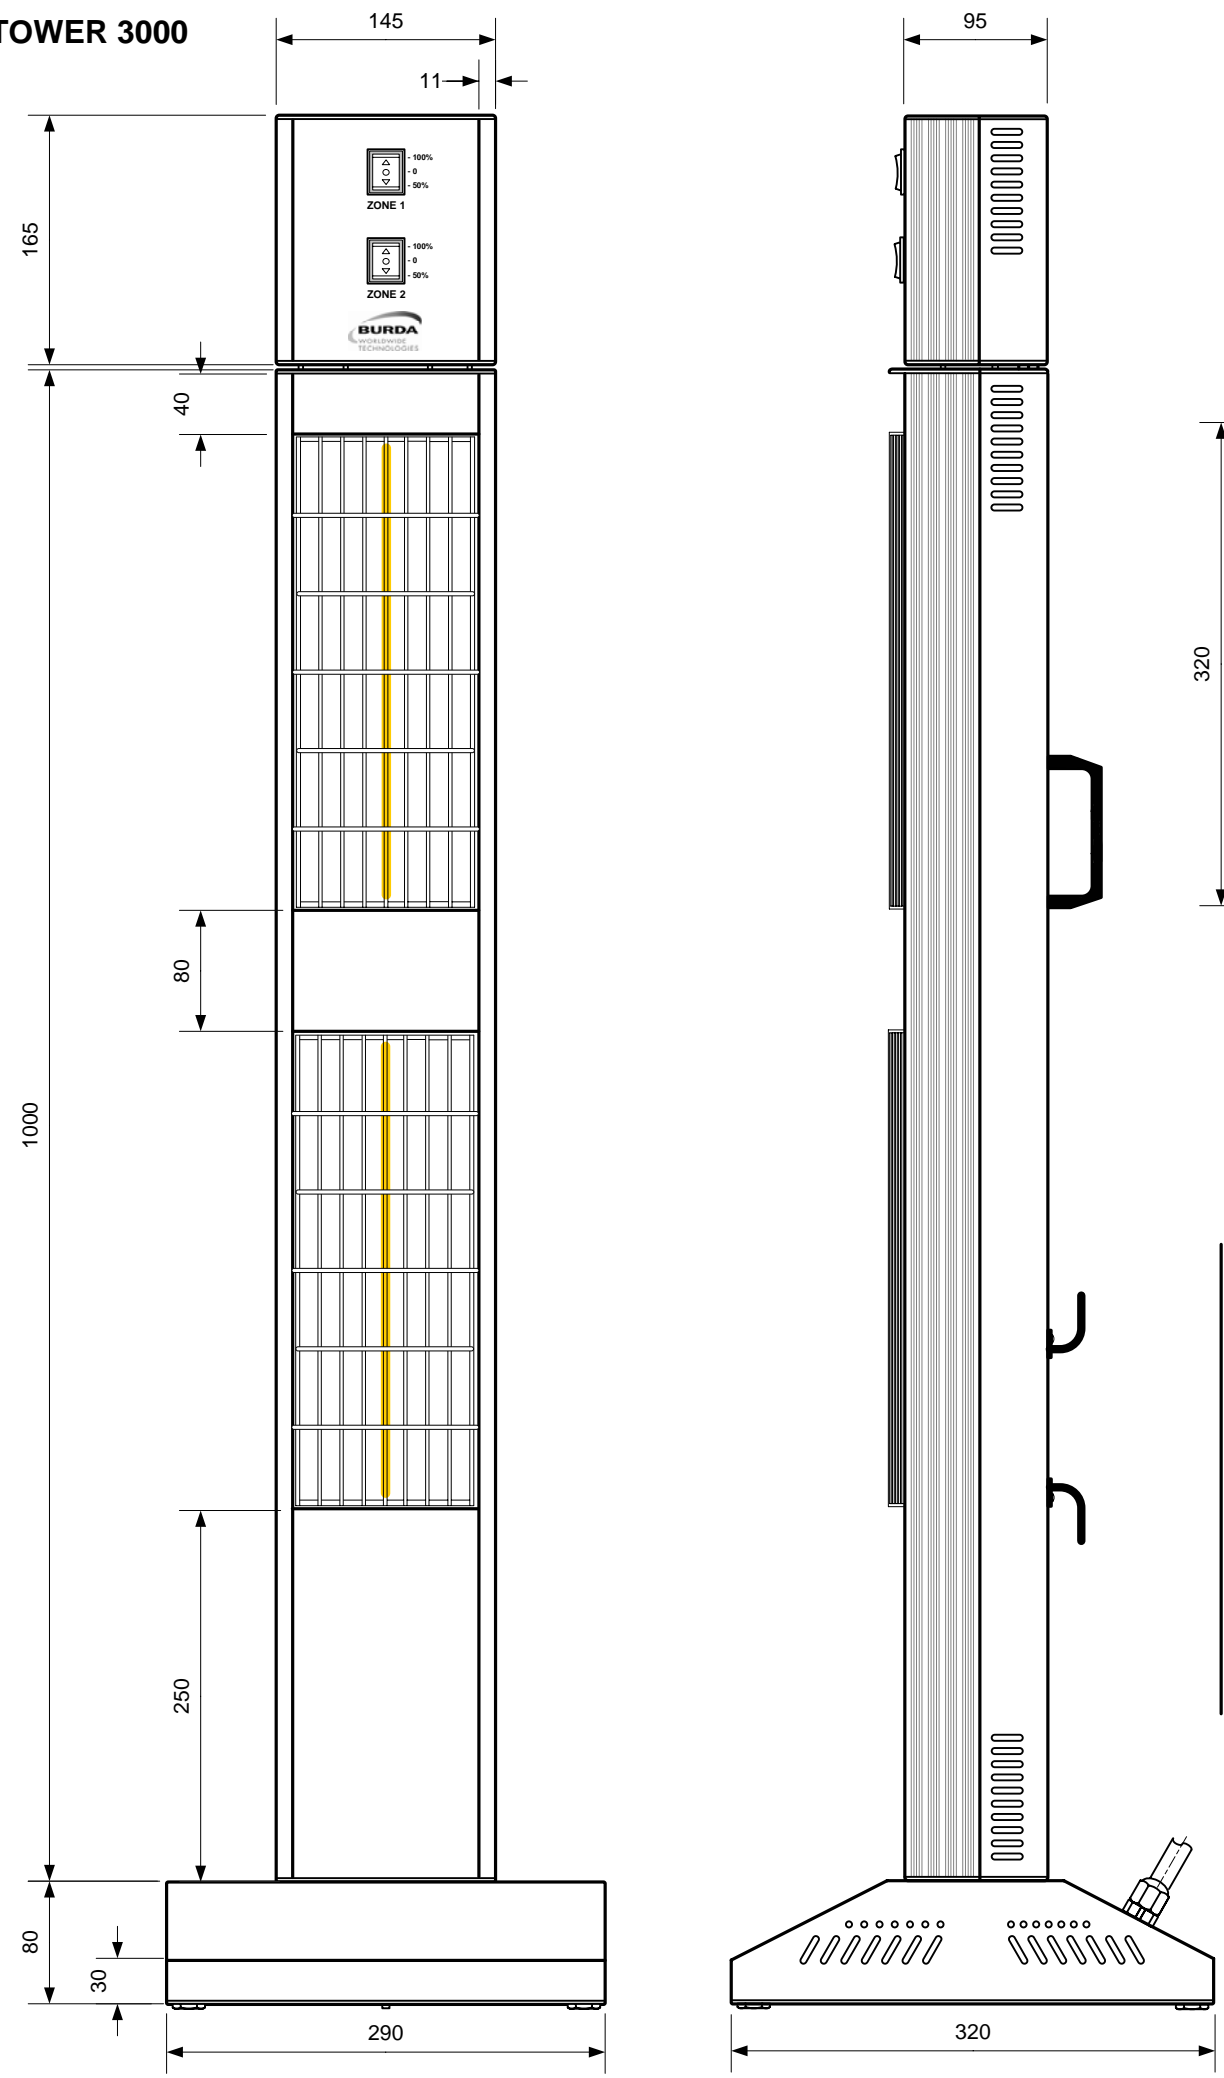

SPEC


- 1) Voltage : 230~240V
- 2) Wattage : 3000W
- 3) Lamp Color Temperature (Coated) : 1600 ± 200K
- 4) Total Weight : 8.5Kg

WORKING CONDITION

- 1) Burning Position : Within Vertical ±5°
- 2) Burning Cycle : Continuous or Intermittent
- 3) Burning Voltage : 230~240V ± 10%
- 4) Frequency : 50/60 Hz

LIFE

- 1) Life time : 5,000 hour (Normal Condition)

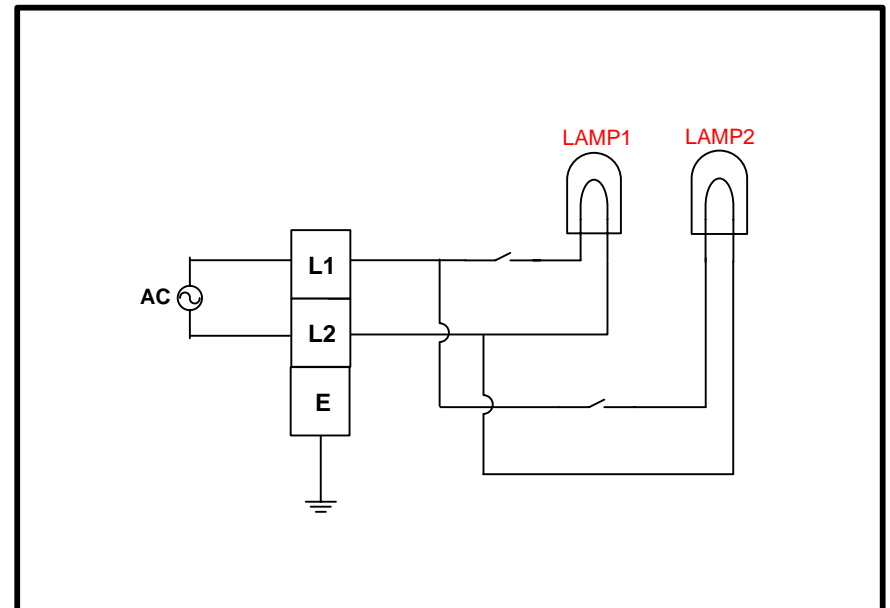NO	ITEM	MATERIAL	Q`TY	SPEC
1	Body	Aluminum	1	t=2.0
2	Bracket	SPCC	1	t=2.0
3	Lamp	Quartz	2	230V 1500W
4	Refector	Aluminum	1	T=0.5
5	Safety grill	SS	1	Φ 1.55 Cr Plating
6	Cable socket	Plug type	1	Silicon (white) H05SS 230V 16A 1.5mm <sup>2</sup> (3m)
7	Micro switch	Thermosetting resin	1	V15F 01C 16A 250V~

				NO	DESCRIPTION	MAT`L	FINISH	Q`TY	REMARK
THIRD ANGLE				UNIT : mm					
PROJECTION				SCALE : FREE					
DRAWN	DESIGNED	CHECKED	APPROVED	도면에 지정되지 않은 일반公差					
				C급 B급 A급 급수					
				±0.05 ±0.10 ±0.05 1~4 mm 미만					
				±0.35 ±0.20 ±0.07 4~16					
				±0.50 ±0.30 ±0.10 16~23					
				±0.90 ±0.55 ±0.16 63~250					
				±1.50 ±0.90 ±0.30 250~500					
				±2.50 ±1.50 ±0.50 500~1000					
HANA									
HANA HALOGEN CO.,LTD									