

# GENERAL CATALOGUE <sup>2021</sup>/<sub>2022</sub>

HEATING · COOLING · LIGHTING  
SOUND · MODULAR · CONTROL



**NEW**

**RELAX GLASS COMPACT** PAGE 9

**io** io-homecontrol® with somfy. Remote



Valid from September 2021.  
(Changes and errors excepted)

**BURDA WORLDWIDE TECHNOLOGIES GMBH**

Rudolf-Diesel-Strasse 18 · D-65760 Eschborn · tel +49 6173 / 324 24 0 · fax +49 6173 / 324 24 24 · email [info@burdawtg.de](mailto:info@burdawtg.de) · [www.burdawtg.com](http://www.burdawtg.com)

# Foreword

## JIRI BURDA



### DEAR BURDA PARTNERS AND CUSTOMERS,

I am pleased to present our current general catalogue 2021/22 to you.

Corona has presented us all with great challenges in the past few months. The withdrawal from public life has severely affected many industries, especially gastronomy. At the same time, the crisis also offered opportunities for the end customer market with the focus on furnishing the home, indoor and outdoor.

One of the most far-reaching consequences of the crisis for manufacturers, however, are global delivery bottlenecks, transport problems, material shortages and increases in cost, which also affect our productions and suppliers to a significant extent. This unfortunately also has an impact reflected in a slight increase in our prices.

Despite all the difficulties, we look to the future with optimism! I thank you, dear partners and customers, for your support and look forward to another successful business year and good cooperation.

**We hope you enjoy browsing through our innovative product range.**

Yours  
Jiri Burda  
Managing Director  
Burda Worldwide Technologies GmbH

A stylized, handwritten signature in black ink, appearing to read 'J. Burda'.

#### **NEW: RELAX GLASS COMPACT** – slim design with WiFi

With the new COMPACT infrared heater, we present an even slimmer WiFi version of the RELAX GLASS heater series with Schott Nextrema® glass ceramic. The new model is also ideal for installation in umbrellas, tents and as a standing solution with pole and base, RELAX GLASS STAND, with double fastening.

page 9

#### **NEW: SMART TOWER COVER**

With the new SMART TOWER protective cover, we offer the perfect solution for the weatherproof, dust-free and dirt-repellent storage of our SMART TOWER standing heaters.

page 33

#### **NEW: Tent fixation TentFIT for heaters**

The tent fastening set including Velcro fastener and safety rope is perfect for installing radiant heaters from the TERM2000 series (polished aluminum) and RELAX GLASS in small and large tents.

page 33

#### **BESTSELLER:**

##### **Short wave radiant heaters RELAX GLASS conquer the markets**

The RELAX GLASS radiant heater series is one of the TOP sales products again this year. The extremely powerful, elegant infrared heater series with Schott Nextrema® glass ceramics offers the best heat output in outdoor areas thanks to shortwave. Available with and without integrated radio dimmer or as a SMART-HOME solution with io-homecontrol® and Somfy remote control. A must-have in every high-quality retailer range.

from page 8

# Content

|                                                 |            |
|-------------------------------------------------|------------|
| <b>IO-HOMECONTROL® HEATER WITH SOMFY REMOTE</b> | page 4-5   |
| <b>BLUETOOTH HEATER</b>                         | page 6-7   |
| <b>RELAX GLASS SERIES</b>                       | page 8-10  |
| <b>NEW: RELAX GLASS COMPACT</b>                 | page 9     |
| <b>RELAX GLASS MODULAR SERIES</b>               | page 11-12 |
| <b>RELAX DARK SERIES</b>                        | page 13    |
| <b>TERM2000 SERIES</b>                          | page 14-17 |
| <b>TERM2000 LIGHT &amp; HEAT</b>                | page 18-19 |
| <b>TERM2000 MODULAR SERIES</b>                  | page 20-25 |
| <b>SMART SERIES</b>                             | page 26-27 |
| <b>PERFECTCLIME® SERIES</b>                     | page 28-31 |
| <b>HEATER ACCESSORIES</b>                       | page 32-37 |
| <b>HEATPANELS</b>                               | page 38-39 |
| <b>HEATPANELS THERMOSTATS AND ACCESSORIES</b>   | page 40    |
| <b>MORE SALES THROUGH SALES PROMOTION</b>       | page 41    |
| <b>GOOD TO KNOW</b>                             | page 42-43 |





## SMART-HOME RADIANT HEATERS

with io-homecontrol® & Somfy remote

Our radiant heater series **RELAX GLASS io** and **TERM2000 io** with io-homecontrol® allow for an easy heater integration into **SMART HOME** solutions by Somfy. A built-in io transmitter/circuit board in the heater corresponds via radio with a remote control from Somfy, via which the infrared heaters can be switched on and off and dimmed in several stages. Every terrace landscape becomes an oasis of well-being with smart heating solutions in exclusive designs. Somfy remote controls are optionally available. Compatible with KNX and TaHoma®.

**Please note:** The io-homecontrol® radio protocol is not a standard in America (North/South), Canada, Australia, New Zealand, India, Israel and Cuba.



homecontrol®

Works with

**somfy**®



2 kW

**No longer in stock!**

74 cm

### TERM2000 io IP67

Slow blow fuse 16 Amp (C16) recommended



| CODE            | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                              | CONNECTION                |
|-----------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------|---------------------------|
| IOURCAC200V9010 | 4260409696570 | 2000               | White      | IP67                | 74 x 10 x 12.5                  | 2500             | 1.9 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| IOURCAC200V9005 | 4260409696587 | 2000               | Black      | IP67                | 74 x 10 x 12.5                  | 2500             | 1.9 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| IOURCAC200V7016 | 4260409696594 | 2000               | Anthracite | IP67                | 74 x 10 x 12.5                  | 2500             | 1.9 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |



RELAX GLASS io IP65

Extremely light reduced with tinted ceramic-glass SCHOTT NEXTREMA®



2.2 kW  
3 kW



OUTDOOR INFRARED HEATER

90 cm



Brackets included

CASE COLORS



GLASS SCREEN



128,6 cm



| CODE           | EAN           | POWER<br>(in watt) | COLOR<br>(Case/Glass) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                              | CONNECTION                |
|----------------|---------------|--------------------|-----------------------|---------------------|---------------------------------|------------------|------------------------------------|---------------------------|
| IOBRELG2200-1  | 4260409696402 | 2200               | Black/Black           | IP65                | 90 x 17 x 15.5                  | 5400             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| IOBRELG2200-3  | 4260409696419 | 2200               | Silver/Schwarz        | IP65                | 90 x 17 x 15.5                  | 5400             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| IOBRELG2200-3W | 4260409696426 | 2200               | Silver/White          | IP65                | 90 x 17 x 15.5                  | 5400             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| IOBRELG3000-1  | 4260409697379 | 3000               | Black/Black           | IP65                | 128.6 x 17 x 15.5               | 7100             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| IOBRELG3000-3  | 4260409696501 | 3000               | Silver/Black          | IP65                | 128.6 x 17 x 15.5               | 7100             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| IOBRELG3000-3W | 4260409696686 | 3000               | Silver/White          | IP65                | 128.6 x 17 x 15.5               | 7100             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |

SOMFY WIRELESS HANDHELD TRANSMITTERS

| CODE       | EAN           | DESCRIPTION               | COLOR | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in mm) |
|------------|---------------|---------------------------|-------|---------------------|---------------------------------|
| IOSIT1VP   | 4260409696716 | Situo 1 VAR io Pure II    | White | IP30                | 38 x 145 x 16                   |
| IOSIT5VAMP | 4260409696723 | Situo 5 VAR AM io Pure II | White | IP30                | 38 x 145 x 16                   |



## BLUETOOTH

Our **BLUETOOTH** radiant heaters **TERM2000 BLUETOOTH** and **SMART BLUETOOTH** enable convenient, wireless heater control via smartphone with the free **BURDA APP** for iOS and Android devices. In addition to smartphone control, the **BLUETOOTH** heaters can be controlled with a un-coded infrared remote control (included in the set) or manually operated using an integrated switch on the device.

### BLUETOOTH DIMMER

With our **BLUETOOTH DIMMER** you can upgrade one or more radiant heaters with a total output of up to 3000 watts and thus enjoy all the advantages of **BLUETOOTH** control via smartphone via the BURDA APP.

See page 34

Available for Burda Bluetooth heater and Bluetooth dimmer.



To download the App please scan the QR-Code.

For free for Android and iOS devices.

- ✓ Regulation for up to eight heaters
- ✓ Range: about 15 m
- ✓ Timer function



### Remote Control included

For an easy control of your Bluetooth heater or dimmer without smartphone.

## TERM2000 BLUETOOTH IP67

Slow blow fuse 16 Amp (C16) recommended



71 cm

2 kW



- ✓ Colors: Anthracite, white and black
- ✓ Ultra Low Glare tube
- ✓ Waterproof IP67

| CODE            | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION           |
|-----------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|----------------------|
| BTURCAC200V9010 | 4260409692442 | 2000               | White      | IP67                | 71 x 10 x 12.5                  | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BTURCAC200V7016 | 4260409692459 | 2000               | Anthracite | IP67                | 71 x 10 x 12.5                  | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BTURCAC200V9005 | 4260409692435 | 2000               | Black      | IP67                | 71 x 10 x 12.5                  | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |

- ✓ Colors: Silver, white and black
- ✓ Splash water protection IP24

2 kW



### Remote Control included

For an easy control of your Bluetooth heater or dimmer without smartphone.



48 cm

## SMART BLUETOOTH IP24

Slow blow fuse 16 Amp (C16) recommended



OUTDOOR INFRARED HEATER

| CODE        | EAN           | POWER<br>(in watt) | COLOR  | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                             | CONNECTION           |
|-------------|---------------|--------------------|--------|---------------------|---------------------------------|------------------|-----------------------------------|----------------------|
| BTBHS2024   | 4260409693135 | 2000               | White  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BTBHS2024-1 | 4260409693142 | 2000               | Black  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BTBHS2024-3 | 4260409693159 | 2000               | Silver | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |

126 cm



Fits with:  
**SMART TOWER COVER**  
see page 33

3 kW



### Remote Control included

For an easy control of your Bluetooth heater or dimmer without smartphone.

## SMART TOWER BLUETOOTH IP24

Slow blow fuse 16 Amp (C16) recommended



- ✓ Colors: Silver, white and black
- ✓ Splash water protection IP24

| CODE        | EAN           | POWER<br>(in watt) | COLOR  | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                             | CONNECTION           |
|-------------|---------------|--------------------|--------|---------------------|---------------------------------|------------------|-----------------------------------|----------------------|
| BTBHS3024   | 4260409694002 | 2 x 1500           | White  | IP24                | 29 x 126 x 32                   | 7300             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BTBHS3024-1 | 4260409694026 | 2 x 1500           | Black  | IP24                | 29 x 126 x 32                   | 7300             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BTBHS3024-3 | 4260409694019 | 2 x 1500           | Silver | IP24                | 29 x 126 x 32                   | 7300             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |



**EXTREME  
LOW  
GLARE**

## RELAX GLASS

OUTDOOR

### RELAX GLASS – POWERFUL HEAT AND STRONG DESIGN WITH SCHOTT NEXTREMA® GLASS CERAMIC

**With the RELAX GLASS heater series we present extremely powerful and visually sophisticated shortwave heaters (IR-A) with Schott Nextrema® ceramic glass fronts for impressive instant heat in all outdoor areas.**

The waterproof radiant heater series impresses with elegance thanks to the smart glass ceramic front paired with high heat output thanks to the use of infrared shortwave technology. A special feature of the glass ceramic radiant heaters is the dimmed red light emission with up to 95% light reduction in the ambience. The designer heaters are available in different power levels (watts), sizes and in varying design colors for glass and housing. Another selection criterion is the equipment. You can choose between heaters with an integrated dimmer and remote control or without and optionally as a smart home solution with io-homecontrol® (see page 5).

RELAX GLASS heaters are suitable for wall and ceiling mounting – with the exception of models with a 2.200 watt heating tube\*. Flush mounted ceiling installation is also possible for all models up to 1.800 watts. A suitable installation frame is available.

\* wall mounting only!


**Suitable accessories: RELAX GLASS STAND, pole and base made of stainless steel for single or double fastening of RELAX GLASS radiant heaters.**

See page 32




## RELAX GLASS COMPACT IRA IP65

Simple remote control via WiFi connection  
per app for Android or iOS with tinted glass  
ceramic SCHOTT NEXTREMA®.

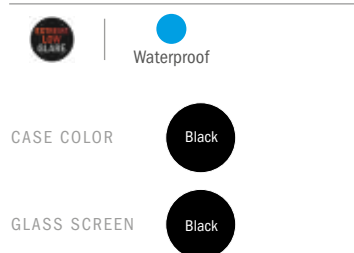

2.0 kW


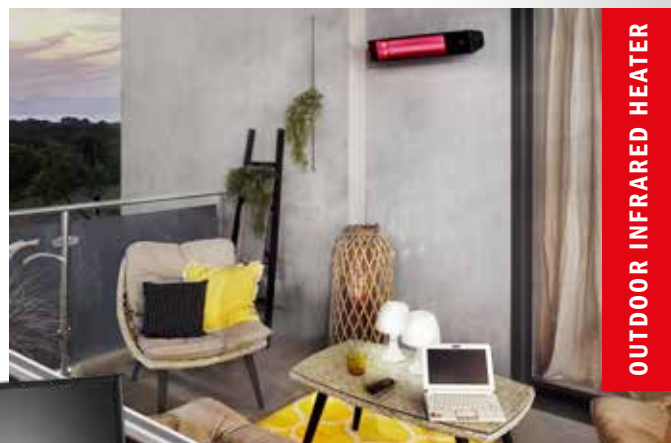


74.2 cm

| CODE         | EAN           | POWER<br>(in watt) | COLOR<br>(Case/Glass) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                             | CONNECTION                |
|--------------|---------------|--------------------|-----------------------|---------------------|---------------------------------|------------------|-----------------------------------|---------------------------|
| BRELG2000RDW | 4260409697751 | 2000               | Black/Black           | IP65                | 74,2 x 13,9 x 11                | 3300             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |

## RELAX GLASS IRA IP65

Extremely light reduced with tinted  
ceramic-glass SCHOTT NEXTREMA®

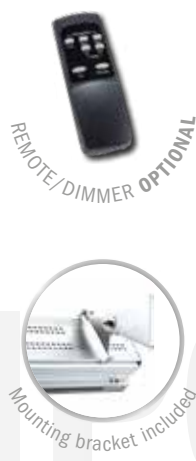

1.5 kW

1.8 kW

2.2 kW




| CODE               | EAN           | POWER<br>(in watt) | COLOR<br>(Case/Glass) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                             | CONNECTION                |
|--------------------|---------------|--------------------|-----------------------|---------------------|---------------------------------|------------------|-----------------------------------|---------------------------|
| With Dimmer/Remote |               |                    |                       |                     |                                 |                  |                                   |                           |
| BRELG1500RD-1      | 4260409695450 | 1500               | Black/Black           | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1500RD-3      | 4260409695443 | 1500               | Silver/Black          | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1500RD-3W     | 4260409695818 | 1500               | Silver/White          | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1800RD-1      | 4260409695436 | 1800               | Black/Black           | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1800RD-3      | 4260409695429 | 1800               | Silver/Black          | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1800RD-3W     | 4260409695825 | 1800               | Silver/White          | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG2200RD-1      | 4260409695412 | 2200               | Black/Black           | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG2200RD-3      | 4260409695405 | 2200               | Silver/Black          | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG2200RD-3W     | 4260409695832 | 2200               | Silver/White          | IP65                | 90 x 17 x 8                     | 5200             | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |

|                       |               |      |              |      |             |      |                                   |                           |
|-----------------------|---------------|------|--------------|------|-------------|------|-----------------------------------|---------------------------|
| Without Dimmer/Remote |               |      |              |      |             |      |                                   |                           |
| BRELG1500-1           | 4260409695764 | 1500 | Black/Black  | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1500-3           | 4260409695382 | 1500 | Silver/Black | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1500-3W          | 4260409695856 | 1500 | Silver/White | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1800-1           | 4260409695771 | 1800 | Black/Black  | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1800-3           | 4260409695375 | 1800 | Silver/Black | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG1800-3W          | 4260409695863 | 1800 | Silver/White | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG2200-1           | 4260409695788 | 2200 | Black/Black  | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG2200-3           | 4260409695368 | 2200 | Silver/Black | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG2200-3W          | 4260409695870 | 2200 | Silver/White | IP65 | 90 x 17 x 8 | 5100 | 1.8 m 3-wire 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |

## RELAX GLASS MULTI IRA IP65 DOUBLE HEATER

Extremely light reduced with tinted ceramic-glass SCHOTT NEXTREMA®



| CODE                  | EAN           | POWER<br>(in watt) | COLOR<br>(Case/Glass) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                              | CONNECTION                |
|-----------------------|---------------|--------------------|-----------------------|---------------------|---------------------------------|------------------|------------------------------------|---------------------------|
| With Dimmer/Remote    |               |                    |                       |                     |                                 |                  |                                    |                           |
| BRELG3000RD-1         | 4260409697386 | 3000               | Black/Black           | IP65                | 128.6 x 17 x 8                  | 6800             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG3000RD-3         | 4260409695252 | 3000               | Silver/Black          | IP65                | 128.6 x 17 x 8                  | 6800             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG3000RD-3W        | 4260051488226 | 3000               | Silver/White          | IP65                | 128.6 x 17 x 8                  | 6800             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| Without Dimmer/Remote |               |                    |                       |                     |                                 |                  |                                    |                           |
| BRELG3000-1           | 4260409697706 | 3000               | Black/Black           | IP65                | 128.6 x 17 x 8                  | 6800             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG3000-3           | 4260409696754 | 3000               | Silver/Black          | IP65                | 128.6 x 17 x 8                  | 6800             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELG3000-3W          | 4260409696761 | 3000               | Silver/White          | IP65                | 128.6 x 17 x 8                  | 6800             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |

## RELAX GLASS BUILT-IN MODELS

All\* RELAX GLASS models are also suitable for flush-mounted ceiling installation. Just select the appropriate frame!

L: Frame for 1500/1800 Watt models.

\* except 2200 and 3000 Watt heaters



| CODE      | EAN           | DESCRIPTION                     | COLOR  | MATERIAL          | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) |
|-----------|---------------|---------------------------------|--------|-------------------|---------------------------------|------------------|
| Frame     |               |                                 |        |                   |                                 |                  |
| BRELGFL-1 | 4260409695481 | Frame for 1500/1800 watt models | Black  | Cold-rolled steel | 97.8 x 23.1 x 12.3              | 3200             |
| BRELGFL-3 | 4260409695474 | Frame for 1500/1800 watt models | Silver | Stainless steel   | 97.8 x 23.1 x 12.3              | 3500             |



## RELAX GLASS MODULAR

The **RELAX GLASS series** can be extended to a multifunctional system with light (RELAX GLASS LIGHT), cooling (RELAX GLASS NOZZLES), loudspeakers (RELAX GLASS Sound) and PANELS. A 10 cm connecting element (MODULAR DISTANCE) with connecting screws (MODULAR CONNECTOR) is required to connect the modules on the switching page. The connection of smooth sides only requires the connecting element. All RELAX MODULES are also available as stand-alone products\* for individual installation.

\*except NOZZLES

### RELAX GLASS LIGHT IP65

As a stand-alone product or modular extension

Light module with two LED spots and glass front.

CASE COLORS

Silver

Black

GLASS SCREEN

Black

2 x 5 W



90 cm

| CODE     | EAN           | POWER<br>(in watt) | COLOR<br>(Case/Glass) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                              | CONNECTION             |
|----------|---------------|--------------------|-----------------------|---------------------|---------------------------------|------------------|------------------------------------|------------------------|
| BRELGL-1 | 4260409696211 | 2 X 5 W            | Black/Black           | IP65                | 90 x 17 x 8                     | 4150             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240V~50 Hz |
| BRELGL-3 | 4260409696228 | 2 X 5 W            | Silver/Black          | IP65                | 90 x 17 x 8                     | 4150             | 1.8 m 3-wire, 1.5 mm², Schuko plug | L/N/PE, 230-240V~50 Hz |

### RELAX GLASS SOUND IP65

As a stand-alone product or modular extension

Bluetooth speaker

CASE COLORS

Silver

Black

GLASS SCREEN

Black

100 W

90 cm



- Bluetooth Version 4.0
- Subwoofer-driver  
66 Hz - 6K Hz
- BassUp-Technologie  
Digital Amplifier
- Freq Response (Hz) =  
50Hz/60Hz
- Impedance (Ohm)/Sensitivity  
(dB) = AC85-265V/87DB
- Dual Channel 120W

| CODE     | EAN           | POWER<br>(in Watt) | COLOR<br>(Case/Glass) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                              | CONNECTION                |
|----------|---------------|--------------------|-----------------------|---------------------|---------------------------------|------------------|------------------------------------|---------------------------|
| BRELGS-3 | 4260409695351 | 100                | Silver/Black          | IP65                | 90 x 17 x 8                     | 5900             | 1.8 m 3-wire, 1.0 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |
| BRELGS-1 | 4260051488233 | 100                | Black/Black           | IP65                | 90 x 17 x 8                     | 5900             | 1.8 m 3-wire, 1.0 mm², Schuko plug | L/N/PE, 230-240 V ~ 50 Hz |

### RELAX GLASS MODULAR NOZZLE

Extension with connector

Nozzle for evaporative cooling in connection with pump\* and water supply\*.

\* not included in the delivery.

CASE COLORS

Silver

Black

GLASS SCREEN

Black



| CODE     | EAN           | COLOR<br>(Case/Glass) | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) |
|----------|---------------|-----------------------|---------------------------------|------------------|
| BRELGD-1 | 4260409696297 | Black/Black           | 10 x 17 x 8                     | 620              |
| BRELGD-3 | 4260409696303 | Silver/Black          | 10 x 17 x 8                     | 620              |

## RELAX GLASS BLENDE

The systems can be extended at will with the RELAX GLASS PANEL.

CASE COLORS

Silver

Black

GLASS SCREEN

White

Black



90 cm

| CODE       | EAN           | COLOR<br>(Case/Glass) | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) |
|------------|---------------|-----------------------|---------------------------------|------------------|
| BRELGBL-1  | 4260409696266 | Black/Black           | 90 x 17 x 8                     | 4000             |
| BRELGBL-3  | 4260409696259 | Silver/Black          | 90 x 17 x 8                     | 4000             |
| BRELGBL-3W | 4260409696242 | Silver/White          | 90 x 17 x 8                     | 4000             |

## RELAX GLASS MODULAR DISTANCE 10 CM

Connecting element with BRELGCP connector for extending the RELAX GLASS heater with RELAX GLASS SOUND, RELAX GLASS LIGHT, RELAX GLASS BLENDE or RELAX GLASS NOZZLE – only required for connection sides with switch.

CASE COLORS

Silver

Black

GLASS SCREEN

Black



BRELGCP  
BRELGCPIO

| CODE                                 | EAN           | COLOR<br>(Case/Glass) | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) |
|--------------------------------------|---------------|-----------------------|---------------------------------|------------------|
| BRELGC-1                             | 4260409696327 | Black/Black           | 10 x 17 x 8                     | 600              |
| BRELGC-3                             | 4260409696310 | Silver/Black          | 10 x 17 x 8                     | 600              |
| <b>RELAX GLASS MODULAR CONNECTOR</b> |               |                       |                                 |                  |
| BRELGCP                              | 4260409696334 | Silver                | 10.5 x 10 x 2.5                 | 113              |
| BRELGCPIO                            | 4260409697768 | Silver                | 10.5 x 10 x 2.5                 | 200              |

## SPARE PARTS

| CODE                    | EAN           | DESCRIPTION                                                                      | COLOR  | MATERIAL                             | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) |
|-------------------------|---------------|----------------------------------------------------------------------------------|--------|--------------------------------------|---------------------------------|------------------|
| <b>Remote</b>           |               |                                                                                  |        |                                      |                                 |                  |
| BRELGR                  | 4260409695511 | Remote for 1200 watt models, ON/OFF function, Timer 1 h.                         | Black  | ABS: Acrylonitrile Butadiene Styrene | 4.5 x 12.5                      | 50               |
| BRELGRD                 | 4260409695504 | Remote for 1500/1800/2200 watt models with Dimmer (33/66/100 %) and Timer (3 h.) | Black  | ABS: Acrylonitrile Butadiene Styrene | 4.5 x 12.5                      | 50               |
| <b>Mounting bracket</b> |               |                                                                                  |        |                                      |                                 |                  |
| BRELGB-3                | 4260409695566 | Mounting bracket                                                                 | Silver | Stainless steel                      | 16.6 x 11.6                     | 450 g/set        |

## RELAX DARK

INDOOR &amp; OUTDOOR

**Dark radiator with infrared long-wave for indoor and wind-protected outdoor areas**

Powerful dark radiators distinguished by their both elegant and ergonomic design – completely without light. The waterproof long-wave heater series **RELAX DARK IRC IP55** supplies the circulating air evenly with heat (convection heat) and fits elegantly into any ambience with its flat, linear design in silver or black. Simple elegance and high functionality offer many possible uses. **Please note:** Due to the long-wave IR radiation, dark radiant heaters are only suitable for use in wind-free outdoor areas.



158 cm

212 cm

2.2 kW

2.4 kW

4.5 kW



Brackets included

## RELAX DARK IRC IP55

NO LIGHT with intelligent long-wave technology

## COLORS

Silver

Black

**INDOOR:** For indoor use of the models BRELD2200 and BRELD2400, the external control BPIRF (wireless), BHCINSTAT+3R (wired) or BHC-FIT3R (wired) or equivalent must be used to comply with EU Regulation 2015/1188. Otherwise the device loses the CE mark.

- ✓ Infrared-long-wave IRC with 2200/2400 and 3000 watt for comforting warmth
- ✓ NO light emission
- ✓ High quality, waterproof design IP55
- ✓ Colors Black and Silver (4500 watt black only)
- ✓ Power connection 230/380-400 Volt with 16A fuse

| CODE        | EAN           | POWER<br>(in watt) | COLOR  | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                                  | CONNECTION                  |
|-------------|---------------|--------------------|--------|---------------------|---------------------------------|------------------|--------------------------------------------------------|-----------------------------|
| BRELD2200-3 | 4260409695580 | 2200               | Silver | IP55                | 158 x 20.1 x 5.8                | 8100             | 1.90 m 3-wire, 1.5 mm², Schuko plug                    | 220-240 V ~ 50-60 Hz        |
| BRELD2400-1 | 4260409695573 | 2400               | Black  | IP55                | 158 x 20.1 x 5.8                | 8100             | 1.90 m 3-wire, 1.5 mm², Schuko plug                    | 220-240 V ~ 50-60 Hz        |
| BRELD4500-1 | 4260409696549 | 4500               | Black  | IP55                | 212 x 25 x 7                    | 16000            | 3 m, 5-wire, 1 mm², bared and stripped, without sleeve | 3/N/PE 380-400 V ~ 50-60 Hz |





## TERM2000

OUTDOOR

The waterproof **TERM2000** easily supplies all outdoor areas with instant and cosy warmth – for up to 5000 hours. Depending on the application area and requirement, the **TERM2000** is available in the protection category IP44 (splash water protection) or completely waterproof in the IP67 version. The powerful heaters are available both as single or double heaters as well as triple power heaters and offer a range from 1000 up to 8000 watts – depending on the configuration. The **TERM2000** series also fulfils every desire in terms of colour choice: ranging from popular standard colours in white, black or anthracite to your favourite colour.

For large outdoor areas, all the advantages of the **TERM2000** series are also available as a standing device **TERM TOWER PALMS**.

Ideal for the hotel and food service industry, **TERM TOWER PALMS** offers optimal heating performance in large areas where lacking mounting options have prevented the use of other systems so far.

\*other colors are available at an additional cost



TERM TOWER  
PALMS IP67



TERM2000  
IP44

TERM2000  
IP67



1 kW  
1.5 kW  
1.65 kW  
2 kW



Mounting bracket included  
Aluminum-Color-Heater: **T-Bracket**  
Aluminum-Heater: **L-Bracket**

## TERM2000 IP67



All colors available!

45 cm – 61 cm

| CODE          | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION           |
|---------------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|------------------------------------------------|----------------------|
| RCA100        | 4260051480503 | 1000               | Polished aluminum | IP67                | 45 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| RCA165        | 4260051480237 | 1650               | Polished aluminum | IP67                | 61 x 9.5 x 12.5                 | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| RCA200V       | 4260051480275 | 2000               | Polished aluminum | IP67                | 61 x 9.5 x 12.5                 | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCA100V      | 4260051485577 | 1000               | Polished aluminum | IP67                | 45 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCA150V      | 4260051485386 | 1500               | Polished aluminum | IP67                | 61 x 9.5 x 12.5                 | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCA165V      | 4260051483863 | 1650               | Polished aluminum | IP67                | 61 x 9.5 x 12.5                 | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCA200V      | 4260051484150 | 2000               | Polished aluminum | IP67                | 61 x 9.5 x 12.5                 | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC150V9010 | 4260051485607 | 1500               | White             | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC165V9010 | 4260051485614 | 1650               | White             | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC200V9010 | 4260051485621 | 2000               | White             | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC150V9005 | 4260051486222 | 1500               | Black             | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC165V9005 | 4260051486239 | 1650               | Black             | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC200V9005 | 4260051486246 | 2000               | Black             | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC150V7016 | 4260051488240 | 1500               | Anthracite        | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC165V7016 | 4260051488257 | 1650               | Anthracite        | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCAC200V7016 | 4260051486581 | 2000               | Anthracite        | IP67                | 61 x 9.5 x 12.5                 | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |



60 cm

3.3 kW  
4 kW  
4.95 kW  
6 kW



## TERM2000 MULTI IP67



123.5 cm

| CODE     | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                                | CONNECTION                |
|----------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|------------------------------------------------------|---------------------------|
| URCJ330V | 4260051483870 | 2 x 1650           | Polished aluminum | IP67                | 123.5 x 9.5 x 12.5              | 4900             | 0.65 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 2/N/PE ~ 230 (2N) V 50 Hz |
| URCJ400V | 4260051483887 | 2 x 2000           | Polished aluminum | IP67                | 123.5 x 9.5 x 12.5              | 4900             | 0.65 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 2/N/PE ~ 400 (2N) V 50 Hz |
| URCC495V | 4260051483894 | 3 x 1650           | Polished aluminum | IP67                | 60 x 29 x 12.5                  | 6800             | 0.65 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URCC600V | 4260051483900 | 3 x 2000           | Polished aluminum | IP67                | 60 x 29 x 12.5                  | 6800             | 0.65 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |



Available with table and ashtray

250-270 cm



3 kW

4 kW

6 kW

8 kW



## TERM TOWER PALMS IP67



| CODE           | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in kg) | CABLE                                              | CONNECTION                |
|----------------|---------------|--------------------|-------------------|---------------------|---------------------------------|-------------------|----------------------------------------------------|---------------------------|
| URTT300V       | 4260051488561 | 2 x 1500           | Polished aluminum | IP67                | 110 x 250-270                   | ca. 45            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTT400V       | 4260051483917 | 2 x 2000           | Polished aluminum | IP67                | 110 x 250-270                   | ca. 49            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTT600V       | 4260051483924 | 3 x 2000           | Polished aluminum | IP67                | 110 x 250-270                   | ca. 51            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTT800V       | 4260051483931 | 4 x 2000           | Polished aluminum | IP67                | 110 x 250-270                   | ca. 53            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC300V9005 | 4260051488578 | 2 x 1500           | Black             | IP67                | 110 x 250-270                   | ca. 49            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC400V9005 | 4260051487779 | 2 x 2000           | Black             | IP67                | 110 x 250-270                   | ca. 49            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC600V9005 | 4260051487786 | 3 x 2000           | Black             | IP67                | 110 x 250-270                   | ca. 51            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC800V9005 | 4260051487793 | 4 x 2000           | Black             | IP67                | 110 x 250-270                   | ca. 53            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC300V9010 | 4260051488585 | 2 x 1500           | White             | IP67                | 110 x 250-270                   | ca. 49            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC400V9010 | 4260051488196 | 2 x 2000           | White             | IP67                | 110 x 250-270                   | ca. 49            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC600V9010 | 4260051488202 | 3 x 2000           | White             | IP67                | 110 x 250-270                   | ca. 51            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| URTTTC800V9010 | 4260051488219 | 4 x 2000           | White             | IP67                | 110 x 250-270                   | ca. 53            | 10 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| RTTT           | 4260051480589 | Table              | Black Werzalit    |                     | 59 x 2.3 x 59                   | 4.16              | -                                                  | -                         |
| RTTA           | 4260051480596 | Ashtray            | Polished aluminum |                     | 6 x 12.5 x 6                    | 1                 | -                                                  | -                         |



42.5 cm

2 kW



## TERM2000 CVH IP20

Infrared lacquer or building dryer –  
Multifunctional, portable dryer for material heating and drying

| CODE                   | EAN           | POWER<br>(in watt) | COLOR  | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION           |
|------------------------|---------------|--------------------|--------|---------------------|---------------------------------|------------------|------------------------------------------------|----------------------|
| RCAC020VH-1            | 4260051482293 | 2000               | Black  | IP20                | 42.5 x 15 x 21                  | 1500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| RCAC020VH-4            | 4260051482309 | 2000               | Red    | IP20                | 42.5 x 15 x 21                  | 1500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| RCAC-E protective grid | 4260409692329 | -                  | Silver | -                   | -                               | -                | -                                              | -                    |





| CODE       | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION           |
|------------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|------------------------------------------------|----------------------|
| URCA01044V | 4260051488653 | 1000               | Polished aluminum | IP44                | 50.3 x 10 x 12.5                | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCA01544V | 4260051488509 | 1500               | Polished aluminum | IP44                | 50.3 x 10 x 12.5                | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |



| CODE             | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION           |
|------------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|----------------------|
| URCACS01044V9010 | 4260051488592 | 1000               | White      | IP44                | 46.4 x 9.5 x 12.5               | 2100             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCACS01544V9010 | 4260051488370 | 1500               | White      | IP44                | 46.4 x 9.5 x 12.5               | 2100             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCACS01044V9005 | 4260051488608 | 1000               | Black      | IP44                | 46.4 x 9.5 x 12.5               | 2100             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCACS01544V9005 | 4260051488394 | 1500               | Black      | IP44                | 46.4 x 9.5 x 12.5               | 2100             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCACS01044V7016 | 4260051488615 | 1000               | Anthracite | IP44                | 46.4 x 9.5 x 12.5               | 2100             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| URCACS01544V7016 | 4260051488424 | 1500               | Anthracite | IP44                | 46.4 x 9.5 x 12.5               | 2100             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |



# TERM2000 LIGHT & HEAT

OUTDOOR

Wherever the “right” brightness counts, our patented combined heating/lighting appliances are the first choice. In terms of technology and design, they are based on the established TERM2000 series combined with 2 or 4 LED spots (240V/3.5W). The appliances are waterproof in accordance with IP65. Heating tubes and light can be controlled and dimmed analogously or separately. Especially modulated dimmers are available as accessories, see page 24/35.

**ULTRA  
LOW  
GLARE**

4.0 kW + 14 W (LEDs)

200 cm

## TERM2000 L&H XL IP65 LED

ULTRA  
LOW  
GLARE

LIGHT

Waterproof



Mounting bracket included  
aluminum colored heater: **T-Bracket**  
aluminum polished heater: **L-Bracket**

| CODE          | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                               | CONNECTION           |
|---------------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|-----------------------------------------------------|----------------------|
| URLH4265      | 4260051484075 | 2 x 2000 + 14      | Polished aluminum | IP65                | 200 x 9.5 x 12.5                | 7100             | 1.9 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 V 50 Hz |
| URLHC42657016 | 4260409692602 | 2 x 2000 + 14      | Anthracite        | IP65                | 200 x 9.5 x 12.5                | 7100             | 1.9 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 V 50 Hz |
| URLHC42659010 | 4260409691575 | 2 x 2000 + 14      | White             | IP65                | 200 x 9.5 x 12.5                | 7100             | 1.9 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 V 50 Hz |
| URLHC42659005 | 4260409691582 | 2 x 2000 + 14      | Black             | IP65                | 200 x 9.5 x 12.5                | 7100             | 1.9 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 V 50 Hz |



1.65 kW + 7 W (LEDs)

2.0 kW + 7 W (LEDs)



## TERM2000 L&H FIX IP65 LED



78 cm

| CODE      | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                               | CONNECTION           |
|-----------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|-----------------------------------------------------|----------------------|
| URLH1765F | 4260051484044 | 1650 + 7           | Polished aluminum | IP65                | 78 x 9.5 x 12.5                 | 3350             | 1.9 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 2/N/PE ~ 230 V 50 Hz |
| URLH2165F | 4260051484051 | 2000 + 7           | Polished aluminum | IP65                | 78 x 9.5 x 12.5                 | 3350             | 1.9 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 2/N/PE ~ 230 V 50 Hz |

1.65 kW + 7 W (LEDs)

2.0 kW + 7 W (LEDs)

180°

82.5 cm



## TERM2000 L&H IP65 LED



| CODE     | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                               | CONNECTION              |
|----------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|-----------------------------------------------------|-------------------------|
| URLH1765 | 4260051484020 | 1650 + 7           | Polished aluminum | IP65                | 82.5 x 9.5 x 12.5               | 3350             | 1.9 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 2/N/PE ~ 230 V<br>50 Hz |
| URLH2165 | 4260051484037 | 2000 + 7           | Polished aluminum | IP65                | 82.5 x 9.5 x 12.5               | 3350             | 1.9 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 2/N/PE ~ 230 V<br>50 Hz |





## MODULARSYSTEM

OUTDOOR



## YOU HAVE THE CHOICE – COMPLETELY **INDIVIDUAL** OR STANDARD **SETS**


We adjust and combine according to your needs, wishes and design – easy and completely individual! Our unique and patented modular concept with heating, LED lights and cooling systems, offer individual combinations for every project: Together with awnings, conservatories, patio roofs, i. e. also for stadiums, exhibition halls, or just stand-alone on your balcony. Combine single modules or standard sets to every desired color and length – 10, 20, 30, 50 or 100 m, no problem! Choose from our standard colors pure white (9010), Black (9005) and anthracite (7016) or with a supplementary charge for an individual color of your choice. Mounting brackets are included. Whether single modules or standard modular sets, order now!

✓ MODULAR ✓ INDIVIDUAL ✓ EVERY LENGTH


✓ EVERY COLOR ✓ WATERPROOF IP65/67 ✓ LEDS WITH 3.5 W

Standard Colors:





2 kW + 14 W

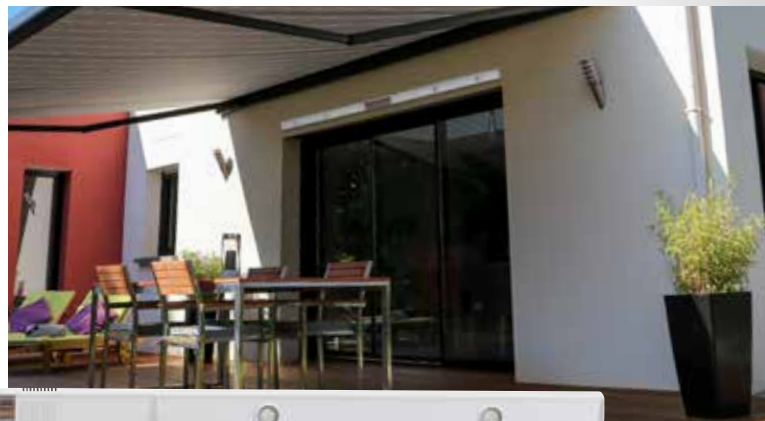

300 cm



## MSET 3.1 = M1 + M2 + M1

2 x LED + 1 x Heater



# IP65

MODULAR

| CODE         | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION                |
|--------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|---------------------------|
| MSET3.1 9010 | 4260409691636 | 2000 + 14          | White      | IP65                | 300 x 9.5 x 12.5                | 7100             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET3.1 9005 | 4260409692831 | 2000 + 14          | Black      | IP65                | 300 x 9.5 x 12.5                | 7100             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET3.1 7016 | 4260409691643 | 2000 + 14          | Anthracite | IP65                | 300 x 9.5 x 12.5                | 7100             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |



4 kW + 7 W



300 cm

## MSET 3.2 = M2 + M1 + M2

1 x LED + 2 x Heater



| CODE         | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION                |
|--------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|---------------------------|
| MSET3.2 9010 | 4260409691858 | 4000 + 7           | White      | IP65                | 300 x 9.5 x 12.5                | 7000             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET3.2 9005 | 4260409692848 | 4000 + 7           | Black      | IP65                | 300 x 9.5 x 12.5                | 7000             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET3.2 7016 | 4260409691872 | 4000 + 7           | Anthracite | IP65                | 300 x 9.5 x 12.5                | 7000             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |

6 kW



300 cm

**MSET 3.3** = M2 + M2 + M2

3 x Heater



IP67

| CODE         | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION                |
|--------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|---------------------------|
| MSET3.3 9010 | 4260409692657 | 6000               | White      | IP67                | 300 x 9.5 x 12.5                | 6900             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET3.3 9005 | 4260409692664 | 6000               | Black      | IP67                | 300 x 9.5 x 12.5                | 6900             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET3.3 7016 | 4260409692688 | 6000               | Anthracite | IP67                | 300 x 9.5 x 12.5                | 6900             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |



4 kW + 14 W



400 cm

**MSET 4.1** = M1 + M2 + M2 + M1

2 x LED + 2 x Heater



| CODE         | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION                |
|--------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|---------------------------|
| MSET4.1 9010 | 4260409692695 | 4000 + 14          | White      | IP65                | 400 x 9.5 x 12.5                | 9400             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET4.1 9005 | 4260409692701 | 4000 + 14          | Black      | IP65                | 400 x 9.5 x 12.5                | 9400             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |
| MSET4.1 7016 | 4260409692725 | 4000 + 14          | Anthracite | IP65                | 400 x 9.5 x 12.5                | 9400             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V 50 Hz |





T-BRACKET INCLUDED

4 kW + 14 W



All colors available!

400 cm



## MSET 4.2 = M2 + M1 + M1 + M2

2 x LED + 2 x Heater



# IP65

MODULAR

| CODE         | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION                   |
|--------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|------------------------------|
| MSET4.2 9010 | 4260409692732 | 4000 + 14          | White      | IP65                | 400 x 9.5 x 12.5                | 9400             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V<br>50 Hz |
| MSET4.2 9005 | 4260409692749 | 4000 + 14          | Black      | IP65                | 400 x 9.5 x 12.5                | 9400             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V<br>50 Hz |
| MSET4.2 7016 | 4260409692763 | 4000 + 14          | Anthracite | IP65                | 400 x 9.5 x 12.5                | 9400             | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V<br>50 Hz |



4 kW + 21 W



All colors available!



T-BRACKET INCLUDED

500 cm

## MSET 5.1 = M1 + M2 + M1 + M2 + M1


3 x LED + 2 x Heater



| CODE         | EAN           | POWER<br>(in watt) | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                          | CONNECTION                   |
|--------------|---------------|--------------------|------------|---------------------|---------------------------------|------------------|------------------------------------------------|------------------------------|
| MSET5.1 9010 | 4260409692770 | 4000 + 21          | White      | IP65                | 500 x 9.5 x 12.5                | 11800            | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V<br>50 Hz |
| MSET5.1 9005 | 4260409692787 | 4000 + 21          | Black      | IP65                | 500 x 9.5 x 12.5                | 11800            | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V<br>50 Hz |
| MSET5.1 7016 | 4260409692800 | 4000 + 21          | Anthracite | IP65                | 500 x 9.5 x 12.5                | 11800            | 1 m 5-wire 1.5 mm <sup>2</sup><br>Wieland plug | 3/N/PE ~ 400 (3N) V<br>50 Hz |

# INDIVIDUAL MODULES AND EQUIPMENT

## M 1 LED MODUL



100 cm – 2 x 3.5 W LED

## M 2 HEATER MODUL



100 cm – 1 x 2000 W Heater

## M 3 HEATER & LED MODUL



100 cm – 2 x 3.5 W LED + 1 x 2000 W Heater



| CODE                             | EAN           | POWER/<br>DESCRIPTION | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                             | CONNECTION           |
|----------------------------------|---------------|-----------------------|------------|---------------------|---------------------------------|------------------|---------------------------------------------------|----------------------|
| <b>M1 LED MODUL</b>              |               |                       |            |                     |                                 |                  |                                                   |                      |
| MRL2C9010                        | 4260409691605 | 2 x 3.5               | White      | IP65                | 100 x 9.5 x 12.5                | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug    | 1/N/PE ~ 230 V 50 Hz |
| MRL2C9005                        | 4260409693098 | 2 x 3.5               | Black      | IP65                | 100 x 9.5 x 12.5                | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug    | 1/N/PE ~ 230 V 50 Hz |
| MRL2C7016                        | 4260409691629 | 2 x 3.5               | Anthracite | IP65                | 100 x 9.5 x 12.5                | 2000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug    | 1/N/PE ~ 230 V 50 Hz |
| <b>M2 HEATER MODUL</b>           |               |                       |            |                     |                                 |                  |                                                   |                      |
| MURCAC200V9010                   | 4260409691520 | 2000                  | White      | IP67                | 100 x 9.5 x 12.5                | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug    | 1/N/PE ~ 230 V 50 Hz |
| MURCAC200V9005                   | 4260409693104 | 2000                  | Black      | IP67                | 100 x 9.5 x 12.5                | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug    | 1/N/PE ~ 230 V 50 Hz |
| MURCAC200V7016                   | 4260409691513 | 2000                  | Anthracite | IP67                | 100 x 9.5 x 12.5                | 2300             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug    | 1/N/PE ~ 230 V 50 Hz |
| <b>M3 HEATER &amp; LED MODUL</b> |               |                       |            |                     |                                 |                  |                                                   |                      |
| MURLHC21659010                   | 4260409691551 | 2000 + 7              | White      | IP65                | 100 x 9.5 x 12.5                | 2400             | 1 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 1/N/PE ~ 230 V 50 Hz |
| MURLHC21659005                   | 4260409691544 | 2000 + 7              | Black      | IP65                | 100 x 9.5 x 12.5                | 2400             | 1 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 1/N/PE ~ 230 V 50 Hz |
| MURLHC21657016                   | 4260409691568 | 2000 + 7              | Anthracite | IP65                | 100 x 9.5 x 12.5                | 2400             | 1 m 5-wire 1.5 mm <sup>2</sup> , Wire-end sleeves | 1/N/PE ~ 230 V 50 Hz |

## MODULAR PANEL

The MODULAR SYSTEM can be extended at will with the MODULAR PANEL, or space out your heating, cooling and lighting modules.

Standard Colors:



| CODE       | EAN           | DESCRIPTION   | COLOR      | DIMENSIONS (w x h x d in cm) | WEIGHT (in g) |
|------------|---------------|---------------|------------|------------------------------|---------------|
| M50BL9010  | 4260409693203 | BLENDE 50 cm  | White      | 50 x 9.5 x 12.5              | 80            |
| M50BL9005  | 4260409693210 | BLENDE 50 cm  | Black      | 50 x 9.5 x 12.5              | 80            |
| M50BL7016  | 4260409693227 | BLENDE 50 cm  | Anthracite | 50 x 9.5 x 12.5              | 80            |
| M75BL9010  | 4260409693234 | BLENDE 75 cm  | White      | 75 x 9.5 x 12.5              | 120           |
| M75BL9005  | 4260409693241 | BLENDE 75 cm  | Black      | 75 x 9.5 x 12.5              | 120           |
| M75BL7016  | 4260409693258 | BLENDE 75 cm  | Anthracite | 75 x 9.5 x 12.5              | 120           |
| M100BL9010 | 4260409693265 | BLENDE 100 cm | White      | 100 x 9.5 x 12.5             | 160           |
| M100BL9005 | 4260409693272 | BLENDE 100 cm | Black      | 100 x 9.5 x 12.5             | 160           |
| M100BL7016 | 4260409693289 | BLENDE 100 cm | Anthracite | 100 x 9.5 x 12.5             | 160           |

## MODULAR SIDEPART SET

With the modular sidepart sets you can easily connect every single Modules of Heat, Light, Nozzles, Panels or even TERM Color heaters within only seconds.

Standard Colors:



| CODE     | EAN           | DESCRIPTION  | COLOR      | DIMENSIONS (w x h x d in cm) | WEIGHT (in g) |
|----------|---------------|--------------|------------|------------------------------|---------------|
| MSPS9010 | 4260409692213 | SIDEPART-SET | White      | 9.5 x 8 x 1                  | 140           |
| MSPS9005 | 4260409692220 | SIDEPART-SET | Black      | 9.5 x 8 x 1                  | 140           |
| MSPS7016 | 4260409692237 | SIDEPART-SET | Anthracite | 9.5 x 8 x 1                  | 140           |

## MODULAR NOZZLES

Our special cooling nozzles can be integrated at any desired place in the system. The cooling takes places with the tried and tested PerfectClime® technology with high-pressure pump and water feed line, page 30.

Standard Colors:



| CODE    | EAN           | DESCRIPTION | COLOR      | DIMENSIONS (w x h x d in cm) | WEIGHT (in g) |
|---------|---------------|-------------|------------|------------------------------|---------------|
| MD19010 | 4260409692091 | MD1 Nozzles | White      | 4.5 x 10 x 8                 | 194           |
| MD19005 | 4260409693111 | MD1 Nozzles | Black      | 4.5 x 10 x 8                 | 194           |
| MD17016 | 4260409692107 | MD1 Nozzles | Anthracite | 4.5 x 10 x 8                 | 194           |



# SMART

## OUTDOOR

### Compact infrared heater with splash water protection and dimmed LOW GLARE technology

The compact infrared heaters of the SMART series, which are equipped with large reflectors, cut a fine figure wherever quick heating is required. The smart heaters are protected against splash water and can be installed onto walls in outdoor areas, under ceilings, as built-in ceiling models or set up as a **SMART TOWER** standing heater. The SMART series is exclusively manufactured with **LOW GLARE** heating tubes, which significantly minimise the infrared light.



1.5 kW  
2 kW  
3 kW  
4 kW  
6 kW




## SMART IP24 & SMART MULTI IP24

LOW  
GLARE



| CODE       | EAN           | POWER<br>(in watt) | COLOR  | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                                | CONNECTION                |
|------------|---------------|--------------------|--------|---------------------|---------------------------------|------------------|------------------------------------------------------|---------------------------|
| BHS1524    | 4260051489568 | 1500               | White  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHS1524-3  | 4260051489551 | 1500               | Silver | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHS2024    | 4260051489575 | 2000               | White  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHS2024-3  | 4260051489582 | 2000               | Silver | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHS2024-1  | 4260051480053 | 2000               | Black  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHS3024    | 4260051487243 | 2 x 1500           | White  | IP24                | 89.5 x 14.5 x 9.5               | 4000             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V/50 Hz      |
| BHS4024    | 4260051487267 | 2 x 2000           | White  | IP24                | 89.5 x 14.5 x 9.5               | 4000             | 0.65 m 5-adri 2.5 mm <sup>2</sup> , Wire-end sleeves | 2/N/PE ~ 230 V 50 Hz      |
| BHS6024    | 4260051487281 | 3 x 2000           | White  | IP24                | 129 x 14.5 x 9.5                | 6000             | 0.65 m 5-wire 2.5 mm <sup>2</sup> , Wire-end sleeves | 3/N/PE ~ 400 (3N) V 50 Hz |
| BHSS1524   | 4260409694934 | 1500               | White  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHSS1524-1 | 4260409694941 | 1500               | Black  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHSS1524-3 | 4260409694958 | 1500               | Silver | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHSS2024   | 4260409694965 | 2000               | White  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHSS2024-1 | 4260409694972 | 2000               | Black  | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |
| BHSS2024-3 | 4260409694989 | 2000               | Silver | IP24                | 48 x 14.5 x 9.5                 | 2500             | 1.9 m 3-wire 1.5 mm <sup>2</sup> , Schuko plug       | 1/N/PE ~ 230 V 50 Hz      |

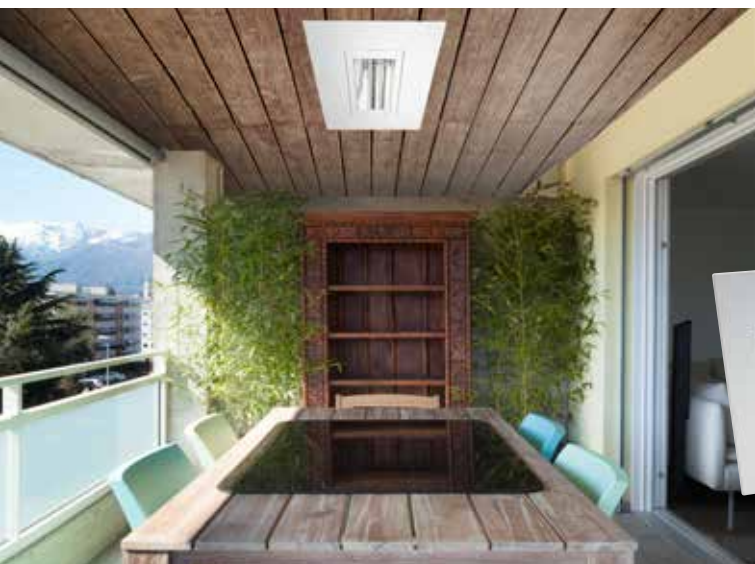

1.5 kW

2 kW



60 cm

**OUTDOOR INFRARED HEATER**

## SMART FRAME IP24 BUILT-IN HEATERS

LOW  
GLARE

| CODE       | EAN           | POWER<br>(in watt) | COLOR  | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                             | CONNECTION           |
|------------|---------------|--------------------|--------|---------------------|---------------------------------|------------------|---------------------------------------------------|----------------------|
| BHSF1524-2 | 4260409694842 | 1500               | White  | IP24                | 60 x 32.5 x 10                  | 3400             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BHSF1524-3 | 4260409694859 | 1500               | Silver | IP24                | 60 x 32.5 x 10                  | 3400             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BHSF2024-2 | 4260409694835 | 2000               | White  | IP24                | 60 x 32.5 x 10                  | 3400             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BHSF2024-3 | 4260409694866 | 2000               | Silver | IP24                | 60 x 32.5 x 10                  | 3400             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |

126 cm

3 kW



## SMART TOWER IP24

LOW  
GLARE

Fits with:

**SMART TOWER COVER**

see page 33

| CODE       | EAN           | POWER<br>(in watt) | COLOR  | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                             | CONNECTION           |
|------------|---------------|--------------------|--------|---------------------|---------------------------------|------------------|---------------------------------------------------|----------------------|
| BHST3024-1 | 4260051484686 | 2 x 1500           | Black  | IP24                | 29 x 126 x 32                   | 7300             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BHST3024   | 4260051484693 | 2 x 1500           | White  | IP24                | 29 x 126 x 32                   | 7300             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BHST3024-3 | 4260051484709 | 2 x 1500           | Silver | IP24                | 29 x 126 x 32                   | 7300             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| BHST3024-4 | 4260051484716 | 2 x 1500           | Red    | IP24                | 29 x 126 x 32                   | 7300             | 1.9 m 3-wire<br>1.5 mm <sup>2</sup> , Schuko plug | 1/N/PE ~ 230 V 50 Hz |



# The first **Heating** **& Cooling** Sensation!

PATENTED



## PERFECTCLIME®

OUTDOOR

The first heating & cooling concept combines infrared short-wave technology in one unit. Instant comfortable heat or refreshing cool air – resulting in a perfect temperature anytime and anywhere. Based on the successful TERM2000 IP67 and SMART IP24, instant heating is guaranteed and due to the integrated nozzle a fine haze leads to a comfortable atmosphere for nearly unlimited professional and private usage. PERFECTCLIME® only at Burda!


### Perfectclime® COOLING

Customized atomization and cooling system made of stainless steel in modular design or as ready **BASIC COOLING SET** for the perfect humidity and cool temperatures on hot days. See page 32.





1.65 kW  
2 kW

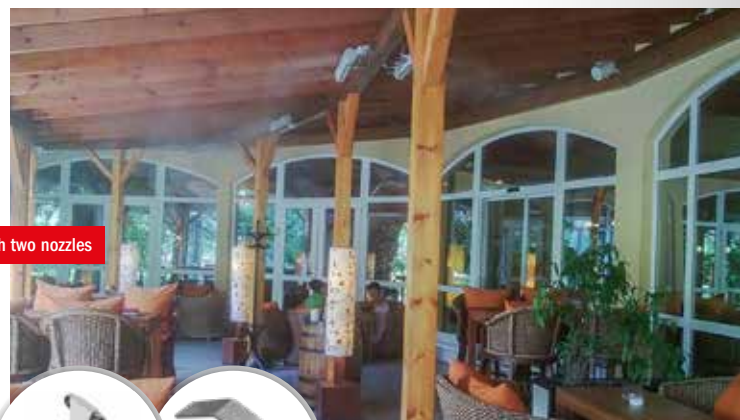

With two nozzles

## PERFECTCLIME® TERM2000 IP67

PERFECTCLIME®



Mounting bracket included  
Aluminum-Color-Heater: **T-Bracket**  
Aluminum-Heater: **L-Bracket**

| CODE             | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                             | CONNECTION           |
|------------------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|-----------------------------------|----------------------|
| UPCRCA165V2      | 4260051484426 | 1650               | Polished aluminum | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| UPCRCA200V2      | 4260051484488 | 2000               | Polished aluminum | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| UPCRCAC165V29010 | 4260409691674 | 1650               | White             | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| UPCRCAC200V29010 | 4260409691681 | 2000               | White             | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| UPCRCAC165V29005 | 4260409691698 | 1650               | Black             | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| UPCRCAC200V29005 | 4260409691704 | 2000               | Black             | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| UPCRCAC165V27016 | 4260409691711 | 1650               | Anthracite        | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |
| UPCRCAC200V27016 | 4260409691728 | 2000               | Anthracite        | IP67                | 70 x 9.5 x 12.5                 | 2900             | 1.9 m 3-wire 1.5 mm², Schuko plug | 1/N/PE ~ 230 V 50 Hz |



1.65 kW + 7 W

2 kW + 7 W

4 kW + 14 W

87 cm

With two nozzles

91 cm

200 cm

## PERFECTCLIME® TERM2000 L&H IP65

PERFECTCLIME®



| CODE         | EAN           | POWER<br>(in watt) | COLOR             | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                | CONNECTION           |
|--------------|---------------|--------------------|-------------------|---------------------|---------------------------------|------------------|--------------------------------------|----------------------|
| UPCRLH1765F2 | 4260051484563 | 1650 + 7           | Polished aluminum | IP65                | 87 x 9.5 x 12.5                 | 4050             | 2 m 5-wire 1.5 mm², Wire-end sleeves | 2/N/PE ~ 230 V/50 Hz |
| UPCRLH2165F2 | 4260051484594 | 2000 + 7           | Polished aluminum | IP65                | 87 x 9.5 x 12.5                 | 4050             | 2 m 5-wire 1.5 mm², Wire-end sleeves | 2/N/PE ~ 230 V/50 Hz |
| UPCRLH17652  | 4260051484556 | 1650 + 7           | Polished aluminum | IP65                | 91 x 9.5 x 12.5                 | 4050             | 2 m 5-wire 1.5 mm², Wire-end sleeves | 2/N/PE ~ 230 V/50 Hz |
| UPCRLH21652  | 4260051484570 | 2000 + 7           | Polished aluminum | IP65                | 91 x 9.5 x 12.5                 | 4050             | 2 m 5-wire 1.5 mm², Wire-end sleeves | 2/N/PE ~ 230 V/50 Hz |
| UPCRLH42652  | 4260051484624 | 2 x 2000 + 14      | Polished aluminum | IP65                | 200 x 9.5 x 12.5                | 7700             | 2 m 5-wire 2.5 mm², Wire-end sleeves | 3/N/PE ~ 400 V 50 Hz |

## PERFECTCLIME® PUMP



| CODE  | EAN           | DESCRIPTION | PROTECTION CLASS | PRESSURE | CONSUMPTION |
|-------|---------------|-------------|------------------|----------|-------------|
| PCE05 | 4260051482347 | Pumpe 05    | IP21             | 70 Bar   | 0.5 l/m     |


## PERFECTCLIME® COUPLINGS

| PICTURE | CODE      | EAN           | DESCRIPTION                                                              |
|---------|-----------|---------------|--------------------------------------------------------------------------|
|         | PCKT      | 4260051483245 | T-Coupling                                                               |
|         | PCKL      | 4260051483252 | L-Coupling                                                               |
|         | PCKS      | 4260051483856 | Straight Coupling                                                        |
|         | PCKE      | 4260051483269 | End Coupling                                                             |
|         | PCKG      | 4260051483276 | Angle Coupling                                                           |
|         | PCIT.0330 | 4260409695948 | Connection coupling, nickel-plated brass,<br>1/4" NPT M - ø6.35mm - 1/4" |

## PERFECTCLIME® POLYAMIDE PIPELINE

| PICTURE | CODE   | EAN           | DESCRIPTION                               |
|---------|--------|---------------|-------------------------------------------|
|         | PCPS25 | 4260051483290 | Polyamide hose 25 cm                      |
|         | PCPG7  | 4260051483313 | Polyamide hose 75 cm                      |
|         | PCPC   | 4260051483320 | Polyamide cutter                          |
|         | PCPB   | 4260051483337 | Hose clamp for polyamide hose, ø6,35 mm   |
|         | PCSS75 | 4260409695313 | Stainless steel pipeline, 75 cm, ø6.35 mm |

## PERFECTCLIME® NOZZLES



| CODE  | EAN           | DESCRIPTION    | 56 BAR VERSION              | 70 BAR VERSION               | 84 BAR VERSION              |
|-------|---------------|----------------|-----------------------------|------------------------------|-----------------------------|
| PCN15 | 4260051483207 | Nozzle 0.15 mm | 0.041 l/min<br>0.011 US Gpm | 0.046 l/min<br>0.0095 US Gpm | 0.051 l/min<br>0.012 US Gpm |
| PCN2  | 4260409697904 | Nozzle 0.20 mm | 0.080 l/min<br>0.021 US Gpm | 0.089 l/min<br>0.024 US Gpm  | 0.098 l/min<br>0.026 US Gpm |
| PCN30 | 4260051483221 | Nozzle 0.30 mm | 0.130 l/min<br>0.034 US Gpm | 0.145 l/min<br>0.038 US Gpm  | 0.159 l/min<br>0.042 US Gpm |
| PCN40 | 4260051483238 | Nozzle 0.40 mm | 0.159 l/min<br>0.047 US Gpm | 0.178 l/min<br>0.047 US Gpm  | 0.195 l/min<br>0.052 US Gpm |

## PERFECTCLIME® FILTER



| CODE    | EAN           | DESCRIPTION                   |
|---------|---------------|-------------------------------|
| PCFKUEU | 4260051483344 | Particle and scale filter set |
| PCFS    | 4260051483351 | Particle filter               |
| PCFSM   | 4260409695955 | Particle filter Mini          |
| PCFUV4  | 4260051482880 | UV filter 480 l/h 6 bar       |
| PCFUV5  | 4260051482897 | UV filter 500l/h 7-10 bar     |

## PERFECTCLIME® COOLING KIT

Customized atomization and cooling system made of stainless steel in modular design for perfect humidity, cool temperatures in the desired cooling radius. **So simple and so effective!** The atomized water from the row of premium, stainless steel nozzles lowers the ambient temperature by up to 12°C and evaporates when it falls to the ground, without moistening objects or people in the process. The PERFECTCLIME® COOLING KIT contains premium accessories and is very easy and quick to install without the need for any special tools, making it a great option.



| PICTURE                 | CODE      | EAN           | DESCRIPTION                                                            |
|-------------------------|-----------|---------------|------------------------------------------------------------------------|
|                         | PCSS75    | 4260409695313 | Stainless steel Pipeline, 75 cm, ø6.35 mm                              |
|                         | PCPS25    | 4260051483290 | Polyamid Pipeline, 25 m, Black                                         |
|                         | PCPS25-2  | 4260409695245 | Polyamid Pipeline, 25 m, White                                         |
|                         | PCN30     | 4260051483221 | Nozzle 0.3 mm                                                          |
|                         | PCN2      | 4260409697904 | Nozzle 0.2 mm                                                          |
|                         | PCN15     | 4260051483207 | Nozzle 0.15 mm                                                         |
|                         | PCKDE     | 4260409695337 | Nozzle Coupling, End                                                   |
|                         | PCKDM     | 4260409695344 | Nozzle Coupling, Straight                                              |
|                         | PCIT.0330 | 4260409695948 | Connection coupling, nickel-plated brass, 1/4" NPT M - ø6.35 mm - 1/4" |
|                         | PCKS      | 4260051483856 | Straight Coupling 6.35 mm                                              |
|                         | PCKE      | 4260051483269 | End Coupling 6.35 mm                                                   |
|                         | PCKT      | 4260051483245 | T-Coupling 6.35 mm                                                     |
|                         | PCKL      | 4260051483252 | L-Coupling 6.35 mm                                                     |
|                         | PCPB      | 4260051483337 | Polyamid pipe mounting, ø6.35 mm                                       |
|                         | PCPC      | 4260051483320 | Polyamid cutter                                                        |
| ADD ON MISTING          |           |               |                                                                        |
|                         | PCE05     | 4260051482347 | Pump 0.5                                                               |
|                         | PCFS      | 4260051483351 | Particle filter                                                        |
| ADD ON MISTING OPTIONAL |           |               |                                                                        |
|                         | PCFKUEU   | 4260051483344 | Filter clause chalk                                                    |
|                         | PCFUV4    | 4260051482880 | UV filter, 480 l/hr                                                    |
|                         | PCFUV5    | 4260051482897 | UV filter, 500 l/hr                                                    |

## PERFECTCLIME® COOLING BASIC SET

PC COOLING set in three meters total length, straight, including four nozzles. Easy installation without special tools.



| CODE       | EAN           | DESCRIPTION                     |
|------------|---------------|---------------------------------|
| PCBASIC300 | 4260409697881 | PERFECTCLIME® COOLING BASIC SET |

**BASIC SET INCLUDES:** ✓ 4 x PCSS75 stainless steel pipe, ø6.35 mm ✓ 5 x PCN2 Nozzle ✓ 4 x PCKDM nozzle coupling, straight ✓ 1 x PCKDE end coupling ✓ 1 x PCKL L-Coupling 6.35 mm, connection from pipeline to pump ✓ 8 x PCPB polyamid pipe mounting ø6.35 mm ✓ 1 x PCPC Polyamid cutter ✓ 1 x PCE05 Pump 0.5 l ✓ 1x PCFS particle filter ✓ 1 x PCFSV ✓ 1 x PCPS25 polyamid hose, black, ø6.35 mm ✓ 1 x PCIT.0330 connection coupling, nickel-plated brass, 1/4" NPT M - ø6.35 mm - 1/4"




# HEATER ADD ONS

Accessories and spare parts to control and install BURDA infrared heaters in order to upgrade, retrofit or expand existing systems.



## FIXATIONS

All BURDA infrared heaters are equipped with a wall attachment (T- or L- bracket) in their standard configuration. However, we offer numerous alternatives such as attachments for ceiling installation, below shutters, with Velcro for installation on rods or polls for example for sun screens, or free-standing on a tripod.

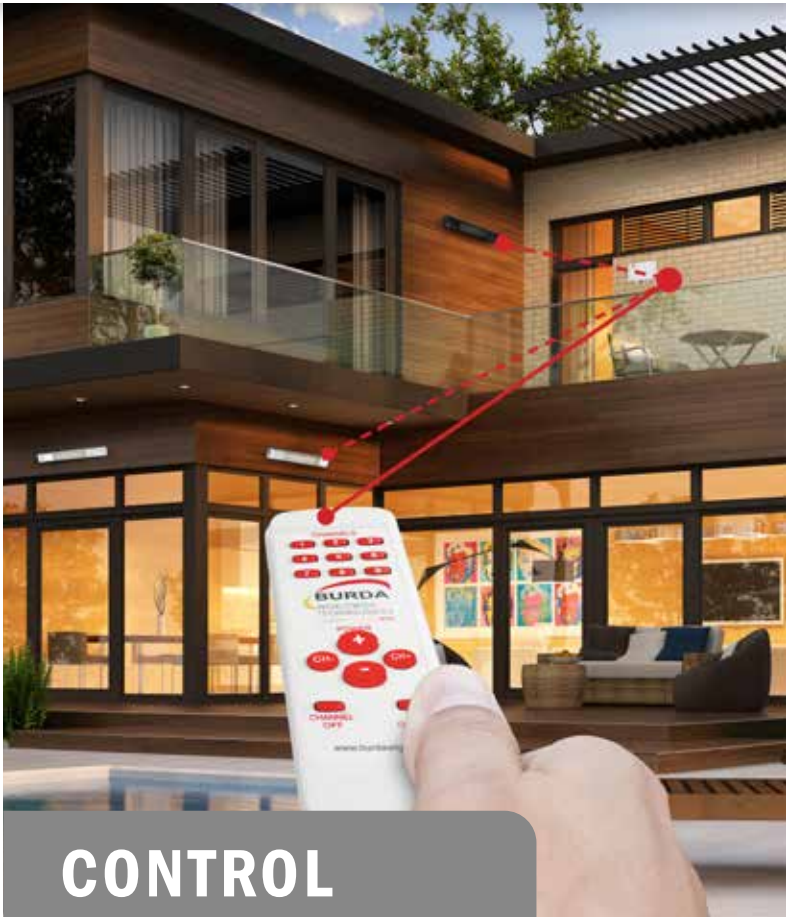

## CONTROL

Dimmers, timers and motion sensors do not only guarantee that our infrared heaters operate resource-efficiently but also contribute to decreased energy costs. Here you will find a large selection of control options for BURDA infrared heaters, from cable (fixed connection), to radio or Bluetooth. Enjoy the comfort of controlling your heater via a remote.

## STATIVE & STANDFUSS



Tripod BHSS for TERM2000 and SMART



BRELGB pole and base stainless steel, for RELAX GLASS heaters



BRELGB pole and base stainless steel with TWIN brackets for RELAX GLASS COMPACT

| CODE                                                                | EAN           | DESCRIPTION | COLOR                   | DIMENSIONS<br>(w x h x d in cm)                         | WEIGHT<br>(in g) |
|---------------------------------------------------------------------|---------------|-------------|-------------------------|---------------------------------------------------------|------------------|
| BHSS-1                                                              | 4260051481357 | STATIV      | Black                   | bis 210                                                 | 2600             |
| BHSS-2                                                              | 4260051487144 | STATIV      | White                   | bis 210                                                 | 2600             |
| BHSS-3                                                              | 4260051487151 | STATIV      | Silver                  | bis 210                                                 | 2600             |
| BRELGB-3                                                            | 4260409696556 | STATIV      | Stainless steel, Silber | Base: Ø 500 mm<br>Pole: Ø 38 mm<br>Total height: 210 cm | 18000            |
| TWIN Brackets for RELAX GLASS COMPACT Stand mounting double heaters |               |             |                         |                                                         |                  |
| BRELGB-TWIN                                                         | 4260409697850 | STATIV      | Stainless steel, Silber | -                                                       | 1000             |

# FIXATIONS

| CODE                                                      | EAN           | COLOR                  | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) |
|-----------------------------------------------------------|---------------|------------------------|---------------------------------|------------------|
| T-BRACKET (standard for all TERM2000 colour heaters)      |               |                        |                                 |                  |
| BCTF9010                                                  | 4260409692961 | White                  | 8                               | 50               |
| BCTF9005                                                  | 4260409692978 | Black                  | 8                               | 50               |
| BCTF7016                                                  | 4260409692985 | Anthracite             | 8                               | 50               |
| L-BRACKET (standard for all aluminium heaters)            |               |                        |                                 |                  |
| BCLF                                                      | 4260409693494 | Silver                 | 13                              | 50               |
| CEILING ATTACHMENT for TERM2000-Series                    |               |                        |                                 |                  |
| BCDF20                                                    | 4260409691452 | Silver                 | 20                              | 95               |
| BCDF209010                                                | 4260409691469 | White                  | 20                              | 95               |
| BCDF209005                                                | 4260409691476 | Black                  | 20                              | 95               |
| BCDF207016                                                | 4260409691483 | Anthracite             | 20                              | 95               |
| AWNING BRACKETS for TERM2000-Series                       |               |                        |                                 |                  |
| MB40409010                                                | 4260409692176 | White                  | 4 x 4 (B x T)                   | 50               |
| MB40409005                                                | 4260409692534 | Black                  | 4 x 4 (B x T)                   | 50               |
| MB40407016                                                | 4260409692619 | Anthracite             | 4 x 4 (B x T)                   | 50               |
| MB40402009010                                             | 4260409693432 | White                  | 4 x 4 x 20 (B x H x T)          | 55               |
| MB40402009005                                             | 4260409693425 | Black                  | 4 x 4 x 20 (B x H x T)          | 55               |
| MB40402007016                                             | 4260409693418 | Anthracite             | 4 x 4 x 20 (B x H x T)          | 55               |
| VELCRO ATTACHMENT                                         |               |                        |                                 |                  |
| KLS1KS                                                    | 4260051489186 | Silver                 | 9 x 3 x 0.2                     | 40               |
| TentFIT TENT FIXATION for TERM2000 and RELAX GLASS Heater |               |                        |                                 |                  |
| BZFIT75                                                   | 4260409693494 | Silver                 | 75                              | 440              |
| BZFIT100                                                  | 4260409697546 | Silver                 | 75                              | 520              |
| BZFIT150                                                  | 4260409697553 | Silver                 | 75                              | 700              |
| SMART TOWER PROTECTION COVER                              |               |                        |                                 |                  |
| BHSTC                                                     | 4260409697805 | Black (100% polyester) | 17 x 17 x 127                   | 265gr/m²         |

## BLUETOOTH DIMMER IP65

Weather-proof BLUETOOTH DIMMER IP65 for App control of heaters with a total power of 3000 to 4000 Watt (depending on model).

Slow blow fuse 16 amp (C16) recommended



BTD3

3 kW  
1 Channel



Waterproof



BTR

| CODE                  | EAN           | POWER<br>(in watt) | COLOR    | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                                            | CONNECTION           |
|-----------------------|---------------|--------------------|----------|---------------------|---------------------------------|------------------|------------------------------------------------------------------|----------------------|
| BLUETOOTH DIMMER IP65 |               |                    |          |                     |                                 |                  |                                                                  |                      |
| BTD3                  | 4260409691094 | 3000, 1 Zone       | Aluminum | IP65                | 11.8 x 8.8 x 4.8                | 900              | 2 x 1.9 m 3-wire 1.5 mm <sup>2</sup> ,<br>Schuko plug and socket | 1/N/PE ~ 230 V 50 Hz |
| BLUETOOTH REMOTE      |               |                    |          |                     |                                 |                  |                                                                  |                      |
| BTR                   | 4260409692510 | –                  | White    | IP20                | 11.8 x 4 x 1.5                  | 60               | –                                                                | –                    |

## RADIO DIMMER + REMOTE



BRFE20

2 kW  
1 Channel



SOLO Bi-Directional



MONO/VARIO Bi-Directional

| CODE         | EAN           | DESCRIPTION                               | POWER<br>(in watt) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                                                   | CONNECTION           |
|--------------|---------------|-------------------------------------------|--------------------|---------------------|---------------------------------|------------------|-------------------------------------------------------------------------|----------------------|
| RADIO DIMMER |               |                                           |                    |                     |                                 |                  |                                                                         |                      |
| BRFE20       | 4260051489261 | Radio dimmer<br>50/66/100%                | 2000               | IP54                | 14.5 x 4.8 x 2.9                | 360              | Power feed<br>490 mm (STAS 3),<br>Line to the heater<br>235 mm (STAK 3) | 1/N/PE ~ 230 V 50 Hz |
| BRHS         | 4260051489094 | Hirschmann Set<br>STAS 3 + STAK 3 + Stasi | –                  | IP54                | 14.5 x 2.8 x 2.3                | 8                | –                                                                       | 250 V/16 A           |

| CODE                | EAN           | DESCRIPTION                   | COLOR      | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) |
|---------------------|---------------|-------------------------------|------------|---------------------|---------------------------------|------------------|
| REMOTE RADIO DIMMER |               |                               |            |                     |                                 |                  |
| BRD-S1              | 4260051489209 | BiDirectional Solo 1 channel  | Black      | IP20                | 7.4 x 4.4 x 1.5                 | 120              |
| BRD-S2              | 4260051489216 | BiDirectional Solo 1 channel  | White      | IP20                | 7.4 x 4.4 x 1.5                 | 120              |
| BRD-S3              | 4260051489223 | BiDirectional Solo 1 channel  | Silver     | IP20                | 7.4 x 4.4 x 1.5                 | 120              |
| BRD-BM3             | 4260051483801 | BiDirectional Mono 1 channel  | Silver     | IP20                | 5.1 x 12 x 2.6                  | 120              |
| BRD-BM2             | 4260051483818 | BiDirectional Mono 1 channel  | White      | IP20                | 5.1 x 12 x 2.6                  | 120              |
| BRD-BM5             | 4260051484204 | BiDirectional Mono 1 channel  | Anthracite | IP20                | 5.1 x 12 x 2.6                  | 120              |
| BRD-BV2             | 4260051483825 | BiDirectional Vario 5 channel | White      | IP20                | 5.1 x 12 x 2.6                  | 120              |
| BRD-BV3             | 4260051483832 | BiDirectional Vario 5 channel | Silver     | IP20                | 5.1 x 12 x 2.6                  | 120              |
| BRD-BV5             | 4260051484211 | BiDirectional Vario 5 channel | Anthracite | IP20                | 5.1 x 12 x 2.6                  | 120              |



## DIMMER FIXED CONNECTION (CABLE)



BHC 4001/BHC 6001

4 kW  
6 kW  
**1 Channel**

 Waterproof



BHC 4002/BHC 6003  
**9 Channels bus system**

4 kW  
**2 Channel**

6 kW  
**3 Channel**

 Waterproof

| CODE                                       | EAN           | DESCRIPTION      | POWER<br>(in watt) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CONNECTION           |
|--------------------------------------------|---------------|------------------|--------------------|---------------------|---------------------------------|------------------|----------------------|
| BH CONTROLLER 1 ZONE IP65 FIXED CONNECTION |               |                  |                    |                     |                                 |                  |                      |
| BHC4001                                    | 4260051480169 | Dimmer, 10-stage | 4000, 1 Channel    | IP65                | 28 x 17 x 8.7                   | 2150             | 1/N/PE ~ 230 V 50 Hz |
| BHC6001                                    | 4260051481562 | Dimmer, 10-stage | 6000, 1 Channel    | IP65                | 28 x 17 x 8.7                   | 2150             | 1/N/PE ~ 230 V 50 Hz |
| BHCR1                                      | 4260051480176 | Remote 1         | Dimmer, 10-stage   | IP20                | 4.5 x 26 x 2                    | 80               | -                    |
| BH CONTROLLER 9 ZONE IP65 FIXED CONNECTION |               |                  |                    |                     |                                 |                  |                      |
| BHC4002-ER                                 | 4260051482835 | Dimmer, 10-stage | 4000, 2 Channels   | IP65                | 28 x 17 x 8.7                   | 2150             | 1/N/PE ~ 230 V 50 Hz |
| BHC6003-ER                                 | 4260051482842 | Dimmer, 10-stage | 6000, 3 Channels   | IP65                | 28 x 17 x 8.7                   | 2150             | 3/N/PE ~ 400 V 50 Hz |
| BHC4002D                                   | 4260051483443 | Dimmer, 10-stage | 4000, 2 Channels   | IP65                | 28 x 17 x 8.7                   | 2150             | 1/N/PE ~ 230 V 50 Hz |
| BHC6003D                                   | 4260051483450 | Dimmer, 10-stage | 6000, 3 Channels   | IP65                | 28 x 17 x 8.7                   | 2150             | 3/N/PE ~ 400 V 50 Hz |
| BHCK                                       | 4260051483559 | Keypad           | -                  | IP65                | 12 x 9 x 4                      | 220              | -                    |
| BHCR9                                      | 4260051483306 | Remote 9         | -                  | IP20                | 4.5 x 26 x 2                    | 80               | -                    |

## TIMER



2 kW  
1 Channel

Timer TS2



4 kW  
1 Channel

Timer TS4



Waterproof



6 kW  
1 Channel

Timer TS6



Waterproof

| CODE  | EAN           | DESCRIPTION           | POWER<br>(in watt) | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE                                                                                     | CONNECTION           |
|-------|---------------|-----------------------|--------------------|---------------------|---------------------------------|------------------|-------------------------------------------------------------------------------------------|----------------------|
| TS2-C | 4260051480107 | Timer<br>5-60 Seconds | 2000               | IP20                | 9.5 x 13 x 5.5                  | 475              | 1.5 m 3-wire 1.5 mm² PVC;<br>with Schuko plug<br>0.5 m 3-wire 1.5 mm² PVC,<br>with socket | 1/N/PE ~ 230 V 50 Hz |
| TS4   | 4260051480077 | Timer<br>1-40 Minutes | 4000               | IP65                | 10 x 12.5 x 7                   | 475              | Fixed connection                                                                          | 1/N/PE ~ 230 V 50 Hz |
| TS6   | 4260409691254 | Timer<br>1-30 Minutes | 6000               | IP65                | 13 x 13 x 7                     | 475              | Fixed connection                                                                          | 1/N/PE ~ 230 V 50 Hz |

## MOTION DETECTORS/TEMPERATURE SENSORS



BPIR4

4 kW



Waterproof



BPIR6

6 kW



Waterproof



BPIR4T

4 kW



Waterproof

| CODE   | EAN           | POWER<br>(in watt) | COLOR | PROTECTION<br>CLASS | DIMENSIONS<br>(w x h x d in cm) | WEIGHT<br>(in g) | CABLE            | CONNECTION               |
|--------|---------------|--------------------|-------|---------------------|---------------------------------|------------------|------------------|--------------------------|
| BPIR4  | 4260051485959 | 4000               | White | IP65                | 10 x 11.2 x 5.5                 | 280              | Fixed connection | 1/N/PE ~ 230 V 50 Hz     |
| BPIR6  | 4260051485966 | 6000               | White | IP65                | 13 x 13 x 7.5                   | 600              | Fixed connection | 1/N/PE ~ 230 V 50 Hz     |
| BPIR4T | 4260409696730 | 4000               | White | IP65                | 10 x 11.2 x 5.5                 | 280              | Fixed connection | 1/N/PE ~ 230-240 V 50 Hz |

SPARE TUBES

Spare tubes for TERM2000-, RELAX- and SMART-infrared heaters

| CODE                           | EAN           | DESCRIPTION      | POWER<br>(in watt) | PROTECTION<br>CLASS | DIMENSIONS<br>(Length in cm) | WEIGHT<br>(in g) | CABLE                                  | CONNECTION        |
|--------------------------------|---------------|------------------|--------------------|---------------------|------------------------------|------------------|----------------------------------------|-------------------|
| LAMPS TERM2000 IP20/IP24/IP44  |               |                  |                    |                     |                              |                  |                                        |                   |
| LG1000                         | 4260051486017 | Cable 357.5 mm   | 1000               | IP20                | 35.75                        | 50               | 295 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LG1000V                        | 4260051486048 | Cable 357.5 mm   | 1000               | IP20                | 35.75                        | 50               | 295 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LG1500                         | 4260051486024 | Cable 357.5 mm   | 1500               | IP20                | 35.75                        | 50               | 295 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LG1500V                        | 4260051486000 | Cable 357.5 mm   | 1500               | IP20                | 35.75                        | 50               | 295 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LG2000                         | 4260051486031 | Cable 357.5 mm   | 2000               | IP20                | 35.75                        | 50               | 295 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LG2000V                        | 4260051486055 | Cable 357.5 mm   | 2000               | IP20                | 35.75                        | 50               | 295 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LG1024                         | 4260051486123 | Cable 355 mm     | 1000               | IP24                | 35.5                         | 50               | 235 mm and 590 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LG1524                         | 4260051486130 | Cable 355 mm     | 1500               | IP24                | 35.5                         | 50               | 295 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LG2024                         | 4260051486147 | Cable 355 mm     | 2000               | IP24                | 35.5                         | 50               | 235 mm and 590 mm, Wire-end sleeves    | 230 V 50 Hz       |
| ULGS1024V                      | 4260051485454 | Cable 355 mm     | 1000               | IP24                | 35.5                         | 50               | 235 mm and 590 mm, Wire-end sleeves    | 230 V 50 Hz       |
| ULGS1524V                      | 4260051484129 | Cable 355 mm     | 1500               | IP24                | 35.5                         | 50               | 235 mm and 590 mm, Wire-end sleeves    | 230 V 50 Hz       |
| ULGS2024V                      | 4260051484136 | Cable 355 mm     | 2000               | IP24                | 35.5                         | 50               | 235 mm and 590 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LAMPS TERM2000 IP65/IP67       |               |                  |                    |                     |                              |                  |                                        |                   |
| LG1001                         | 4260051486185 | Cable 380 mm     | 1000               | IP65/67             | 38                           | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LGS1700V                       | 4260051485973 | Cable 380 mm     | 1700               | IP65/67             | 38                           | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LG1650                         | 4260051486093 | Cable 529 mm     | 1650               | IP65/67             | 52.9                         | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LG2001V                        | 4260051486109 | Cable 529 mm     | 2000               | IP65/67             | 52.9                         | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| ULG1001V                       | 4260051485508 | Cable 380 mm     | 1000               | IP65/67             | 38                           | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| ULG1500V                       | 4260051485430 | Cable 529 mm     | 1500               | IP65/67             | 52.9                         | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| ULG1650V                       | 4260051484105 | Cable 529 mm     | 1650               | IP65/67             | 52.9                         | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| ULG2001V                       | 4260051484112 | Cable 529 mm     | 2000               | IP65/67             | 52.9                         | 50               | 300 mm and 920 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LAMPS NO GLARE IP20            |               |                  |                    |                     |                              |                  |                                        |                   |
| NLG650                         | 4260409691018 | White            | 0.65               | IP20                | Ø6.3                         | 0.8              | 110 mm, Wire-end sleeves               | 230 V 50 Hz       |
| NLG650-1                       | 4260409691391 | Black            | 0.65               | IP20                | Ø6.3                         | 0.8              | 110 mm, Wire-end sleeves               | 230 V 50 Hz       |
| LAMPS BH SMART SK15 IP20/IP24  |               |                  |                    |                     |                              |                  |                                        |                   |
| LGHS1500V                      | 4260051484877 | Cable 350 mm     | 1500               | IP20                | -                            | 50               | 300 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LGHS2000                       | 4260051488103 | Cable 350 mm     | 2000               | IP20                | -                            | 50               | 300 mm double-sided, Wire-end sleeves  | 230 V 50 Hz       |
| LGHS1524V                      | 4260051480770 | Cable 350 mm     | 1500               | IP24                | -                            | 50               | 590 mm and 240 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LGHS2024                       | 4260051489605 | Cable 350 mm     | 2000               | IP24                | -                            | 50               | 590 mm and 240 mm, Wire-end sleeves    | 230 V 50 Hz       |
| LAMPS RELAX GLASS IRA/IRB IP65 |               |                  |                    |                     |                              |                  |                                        |                   |
| BRELGR1200                     | 4260409695559 | RELAX GLASS Tube | 1200               | IP65                | 42.5                         | 50 g/pc          | A: 21 cm x 1.5 mm<br>B: 78 cm x 1.5 mm | 230-240 V ~ 50 Hz |
| BRELGR1200C                    | 4260409696747 | RELAX GLASS Tube | 1200               | IP65                | 66.5                         | 70 g/pc          | A: 21 cm x 1.5 mm<br>B: 78 cm x 1.5 mm | 230-240 V ~ 50 Hz |
| BRELGR1500                     | 4260409695542 | RELAX GLASS Tube | 1500               | IP65                | 66.5                         | 70 g/pc          | 18 cm x 1.5 mm double-sided            | 230-240 V ~ 50 Hz |
| BRELGR1800                     | 4260409695535 | RELAX GLASS Tube | 1800               | IP65                | 66.5                         | 70 g/pc          | 18 cm x 1.5 mm double-sided            | 230-240 V ~ 50 Hz |
| BRELGR2200                     | 4260409695528 | RELAX GLASS Tube | 2200               | IP65                | 66.5                         | 70 g/pc          | 18 cm x 1.5 mm double-sided            | 230-240 V ~ 50 Hz |

ADD ON





Panel heaters from Burda –

# COSY WARMTH

like from a tiled stove

## HEATPANELS

INDOOR

BURDA heatpanels function like the sun: They emit infrared beams which create warmth and work as heat accumulators when they hit people and objects. The energy-consuming „detour“ of convection heating of air in conventional rooms is no longer required. This makes Burda heatpanels economical and your heating experience refreshingly relaxing. Enjoy Burda heatpanels like the sun's rays on a clear winter's day!

### APPLICATIONS

Bathroom, waiting rooms, medical practice, hotels, office and home

#### EU Ecodesign 2015/1188

The installation and use of the heatpanels from 1.1.2018 is only permitted in connection with external thermostats which fulfill the following functions:

- Electronic room temperature control and weekday control
- Adaptive heating control

These requirements are met i. e. with our thermostats: BHC1868, BHCINSTAT+3R, BHCFIT3R

Failure to comply with these requirements will result in the loss of the CE mark



## BASIC HEAT IP54

### FRAMELESS WALL HEATER

The wall heater BASIC HEAT is our cost-effective universal solution. The 500 watt heating plate in white is certified with protection class IP54 (splash water proof) and thus also suitable for use in damp areas. A toggle switch on the device allows convenient on/off switching. Please note: the heating panel is not suitable for ceiling mounting!

- ✓ ON-/OFF switch
- ✓ Painted smooth white
- ✓ Frameless
- ✓ 1.5 cm deep
- ✓ Heat dissipation at almost 100 % on the front
- ✓ Comes with wall-mounting kit
- ✓ Includes 1.9 m cable and plug
- ✓ Protection Class IP54, waterproof
- ✓ 5-year guarantee

| CODE          | EAN           | SURFACE      | DIMENSIONS<br>(w x h x d in cm) | POWER<br>(in watt) | PROTECTION<br>CLASS | WEIGHT<br>(in kg) | CONNECTION           |
|---------------|---------------|--------------|---------------------------------|--------------------|---------------------|-------------------|----------------------|
| BHPBH50100500 | 4260409694712 | White smooth | 50 x 100 x 1.5                  | 500                | IP54                | 10                | 1/N/PE ~ 230 V 50 Hz |



## CLASSIC HEAT IP20

### FRAMELESS WALL AND CEILING HEATER

Our standard model with optimal heating performance. Robust aluminum/steel housing 1.6 cm thick. The CLASSIC HEAT guarantees particularly high heat dissipation through its specially coated surface. The heat panel is scratch resistant and non-yellowing. Suitable for wall and ceiling mounting.

Base (BHPFC) for all CLASSIC HEAT models optional, except BHPCLH4060300.

- ✓ White RAL9016, smooth
- ✓ Frameless
- ✓ 1.6 cm deep
- ✓ Heat dissipation at almost 100 % on the front
- ✓ Safety shut-down in case of overheating
- ✓ Comes with wall- or ceiling mounting kit
- ✓ Includes 1.9 m cable and plug
- ✓ Protection Class IP20
- ✓ 5-year guarantee

| CODE           | EAN           | SURFACE      | DIMENSIONS<br>(w x h x d in cm) | POWER<br>(in watt) | PROTECTION<br>CLASS | WEIGHT<br>(in kg) | CONNECTION           |
|----------------|---------------|--------------|---------------------------------|--------------------|---------------------|-------------------|----------------------|
| BHPCLH4060300  | 4260409694514 | White smooth | 40 x 60 x 1.4                   | 300                | IP20                | 4                 | 1/N/PE ~ 230 V 50 Hz |
| BHPCLH6262400  | 4260409694347 | White smooth | 62 x 62 x 1.6                   | 400                | IP20                | 4                 | 1/N/PE ~ 230 V 50 Hz |
| BHPCLH6060400  | 4260409694354 | White smooth | 60 x 60 x 1.6                   | 400                | IP20                | 4                 | 1/N/PE ~ 230 V 50 Hz |
| BHPCLH6090600  | 4260409694361 | White smooth | 60 x 90 x 1.6                   | 600                | IP20                | 8                 | 1/N/PE ~ 230 V 50 Hz |
| BHPCLH60120900 | 4260409694378 | White smooth | 60 x 120 x 1.6                  | 900                | IP20                | 9                 | 1/N/PE ~ 230 V 50 Hz |
| BHPCLSF        | 4260409695979 | White smooth | 28.15 x 28.8                    | -                  | -                   | 0.565             | -                    |

## RADIO



### BHCI868\*

Radio controlled thermostat INSTAT-868 – **230 V/16 A**

INSTAT-868, the radio-controlled thermostat by Eberle, serves as a temperature and time dependent switch of electrical devices such as fan heaters, circulation pumps, radiators, etc. in conjunction with an INSTAT switching unit. Operation is very simple. Among others, daily and weekly programmes can be set. Battery powered.

#### CODE

#### EAN

BHCI868

4260409690646



### BHCI868A1A

Receiver/switching unit INSTAT868-a1A – **230V/16 A**

Single channel radio controlled receiver as an additional receiver for INSTAT radio controlled thermostats. This device is the ideal surface-mounted solution and switches up to 16 A.

#### CODE

#### EAN

BHCI868a1A

4260409690660



### BHCI868UP

Receiver/switching unit INSTAT-868-UP – **230 V**

Additional receiver for INSTAT radio-controlled thermostats. This device is the ideal flush-mounted solution.

#### CODE

#### EAN

BHCI868UP

4260409690677



### BHCI868R1F

RF window contact INSTAT 868-r1F

Detects open windows in connection with flush-mounted receiver and switches the heater off for max. 30 minutes. Protection class: IP54, Dimensions: 65 x 12 x 28 mm, Power supply: Battery 3 V (CR 2030)

#### CODE

#### EAN

BHCI868r1F

4260409694750

## WIRED



### BHCRTR-E 3311

Schuko socket thermostat – **230 V**

Room temperature regulator, surface-mounted, pure white unit. IP30, adjustable from 5 °C – 30 °C, 1.8 m cable and adapter, thermal feedback.

#### CODE

#### EAN

BHCRTR-E 3311

4260409690684



### BHCITCTI

Socket thermostat with thermo-timer – **230 V/16 A**

Temperature and time dependent switching of electrical devices such as fan heaters, circulation pumps, radiators, etc. You can set daily and weekly schedules. Battery powered. 2-year guarantee.

#### CODE

#### EAN

BHCITCTI

4260409691001



### BHCINSTAT+3R\*

Radio-controlled thermostat – **230 V**

INSTAT-868, the radio-controlled thermostat by Eberle, serves as a temperature and time dependent switch of electrical devices such as fan heaters, circulation pumps, radiators, etc. in conjunction with an INSTAT switching unit. Operation is very simple. Among others, daily and weekly programmes can be set. Battery powered.

#### CODE

#### EAN

BHCINSTAT+3R

4260409690998



### BHCFIT3R\*

Digital socket thermostat – **230 V/16 A**

Pure white colour, flush-mounted. Temperature settings between 5°C – 30°C in increments of 0.5°C. Large display with backlighting at the touch of a button, user-friendly operation, pre-set and adjustable lifestyle programmes, wide range of custom programme settings, automatic switchover to summer/winter settings, protection against unauthorised access, holiday settings by date, frost control, energy consumption indicator.

#### CODE

#### EAN

BHCFIT3R

4260409690981


\* External control of indoor longwave heaters to comply with EU Regulation 2015/1188.



# More Sales Through Sales Promotion



We will gladly advise  
you on start-up and  
language variants  
+49 6173/324 24 0

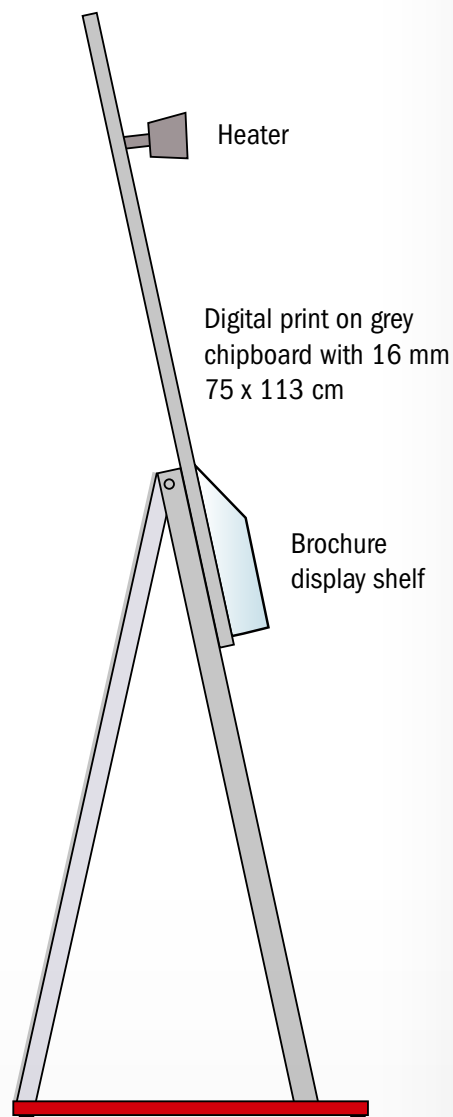

**YOU WILL BE INSPIRED BY  
THE INNOVATIVE INFRARED  
HEATER FROM BURDA.**

Convince your clients with intelligent comfortable heat at the push of a button. With this new professional display, guide the attention of your clients to our innovative heaters. The huge and instant heat output is most effective during this live demonstration.

A push-button timer and a display shelf for complimentary brochures is included.

# Good to know

## WHAT IS INFRARED?

Infrared radiation is a segment of the light spectrum created by the sun. This type of light is no longer visible to the human eye, but only acts as heat radiation. The following applies in general: the shorter the wavelength, the lighter the penetration of the air and the more intensive the heat effect in the body.

## HOW DOES INFRARED RADIATION WORK?

Due to the various wavelengths and the resulting modes of action a distinction is made between three types of infrared radiation:

### **Infrared-A: short-wave IR-A**

780 – 1.400 nm (0,8 – 1,4  $\mu$ ) 3620 K – 2070 K

Short-wave infrared produces heat through heating up the body, which is hit by the radiation, without warming up the surrounding air in the process. In summary: instant heat without heat loss:

**Series: TERM2000 IRA, SMART, RELAX GLASS IRA**

### **Infrared-B: medium-wave IR-B**

1.400 – 3.000 nm (1,4 – 3  $\mu$ ) 2070 K – 965 K

Medium-wave infrared produces a heat radiation, which is also emitted to the surrounding air, to a small extent, and thus does not only increase the perceived temperature but also the room temperature. There is a short lead time.

### **Infrared-C: long-wave**

3.000 – 10.000 nm (3 – 10  $\mu$ ) 965 K – 290 K

Long-wave infrared is the most similar to convection heat in principle. The radiation does not penetrate the body as deeply and leads to an increase in the surrounding temperature. Lead time maximum 20 minutes.

**Series: RELAX DARK, HEATPANELS**

## INFRARED LIGHT INTENSITY

Burda PerfectClima was the first producer of heaters with reduced infrared light using specially coated heating tubes, which, depending on the series, significantly minimise or even reduce the infrared light intensity up to 80 percent:



**EXTREME LOW GLARE** – up to 95% light reduction in the surrounding space. Series: RELAX GLASS



**ULTRA LOW GLARE** – up to 80% less red light. Series: TERM2000



**LOW GLARE** – strongly reduced red light. Series: SMART



**NO GLARE** – completely dimmed dark heater. Series: RELAX DARK



## HOW TO CALCULATE THE REQUIRED RADIANT HEATER POWER!

In order to find out what power an infrared heater must have in order to supply the outdoor area with sufficient heat, various factors play a role:

- Is the terrace/balcony open or protected?
- Exposed outdoor areas require more power than protected or covered areas.
- How big is the area that needs warmth?
- Should only a certain area, for example the seating area, be in the area of thermal radiation or the entire outdoor area?
- Is the outside area exposed to the weather side?
- Wind-protected outdoor areas require less heating power than open areas.

## RECOMMENDATIONS FOR CALCULATING THE HEAT OUTPUT IN WATTS (W) ACCORDING TO THE AREA IN SQM (M<sup>2</sup>):

### **TERM2000 and SMART IRA short-wave:**

- 250 W/m<sup>2</sup> for wind-free, dry outdoor areas
- 300 W/m<sup>2</sup> for partially windy outdoor areas
- 400 W/m<sup>2</sup> for very cold, exposed outdoor areas such as sea/mountains

### **RELAX GLASS IRA short-wave:**

- 350 W/m<sup>2</sup> for wind-free, dry outdoor areas
- 400 W/m<sup>2</sup> for partially windy outdoor areas
- 500 W/m<sup>2</sup> for very cold, exposed outdoor areas, sea/mountains

### **RELAX DARK IRC long-wave:**

- 50-100 W/m<sup>2</sup> for home and office
- 400 W/m<sup>2</sup> for calm, dry outdoor areas

### **HEATPANELS IRC long-wave:**

- 50-60 W/m<sup>2</sup> for home and office
- 80-100 W/m<sup>2</sup> for bathroom

### **PERFECTCLIME cooling nozzles:**

- 1 cooling nozzle has an effective area of approx. 6 m<sup>2</sup>

### **Calculation examples**

#### **TERM2000 for 10sqm partly windy terrace:**

300W x 10sqm = 3.000 watts. For this terrace, you need one or two radiant heaters with a total power of around 3.000 watts. For example 1 x TERM2000 MULTI or 2 x TERM2000 BLUETOOTH.

#### **RELAX GLASS for 10sqm partly windy terrace:**

400W x 10sqm = 4.000 watts. For this terrace, you need two radiant heaters BRELG2200 with 2.200 watts each.

## PROTECTION CATEGORY: IP

The protection category IP first of all offers information on the particle/dust protection and second of all on the water density of the heater. The water density is especially pivotal to the use of the heater in outdoor areas.

### **IP20 is not water resistant.**

Not suitable for outdoor areas.

Series: TERM2000 CVH

### **IP24 with splash water protection.**

Suitable for protected outdoor areas.

Series: SMART

### **IP44 with splash water protection.**

Suitable for protected outdoor areas.

Series: TERM2000 COLOR

### **IP55 Waterproof.**

Suitable for all outdoor areas.

Series: RELAX DARK

### **IP65 Waterproof.**

Suitable for all outdoor areas.

Series: TERM2000 L&H, RELAX GLASS

### **IP67 completely Waterproof – only by BURDA!**

Also suited for unprotected outdoor areas.

Series: TERM2000 IP67



Your dealer

## INTELLIGENT DECISIONS!

Our clients value the outstanding quality and the broad range of application of our products. Whether in the hotel or catering industry or in private areas the BURDA infrared short-wave technology heater and cooler product range convinces the world leading brands and industries. Choose the intelligent solutions to your needs.

## SELECTION OF REFERENCES

### International Cooperation

- AEG/Stiebel Eltron
- Bartscher
- FRICO
- Schwank

### Worldwide first class hotels

- Adlon
- Holiday Inn
- Hilton
- Marriott
- Sheraton
- Steigenberger
- Vier Jahreszeiten ...

### International and national restaurants and cafes

- Blockhouse
- Burger King
- Cafetiero
- Häagen-Dazs
- Hard Rock Cafe
- Le Crobag
- McDonald's
- Nordsee
- Starbucks ...

### Superior grandhotel at sea

- AIDA Cruises
- A-Rosa Cruises
- Celebrity Cruises

### TV-Studio

- Big Brother
- Endemol

### Museum and events

- Louvre Paris – France
- Berlinale Berlin – Germany

### Trade and industry

- Areva
- Ford
- Mercedes
- Thyssen Krupp
- Volkswagen ...

### Air Traffic

- Condor
- Lufthansa
- Royal Air Force
- US Army ...

## BURDA WORLDWIDE TECHNOLOGIES GMBH

Rudolf-Diesel-Strasse 18 · 65760 Eschborn · Germany  
tel +49 6173 / 324 24 0 · fax +49 6173 / 324 24 24  
email [info@burdawtg.de](mailto:info@burdawtg.de) · [www.burdawtg.com](http://www.burdawtg.com)