

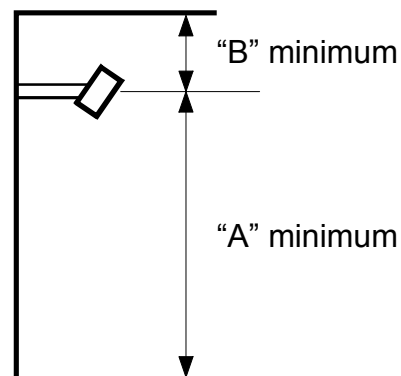


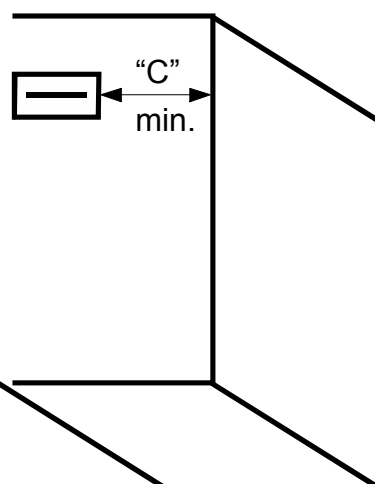













TERM2000 Minimum distances to "A" Floor, "B" Ceiling, "C" Sidewall

TERM2000 Model	Distance minimum		
	A [m]	B [m]	C [m]
1,0 kW to 1,5 kW	1,8	0,15	1,0
1,5 kW to 2,0 kW	2,1	0,15	1,0
3,0 kW to 3,0 kW	3,0	0,20	1,0
4,0 kW to 5,0 kW	3,5	0,20	1,0
6,0 kW to 6,0 kW	4,5	0,30	1,0
7,5 kW to 10,0 kW	5,0	1,00	1,5
12,0 kW to 18,0 kW	6,0	1,00	2,0

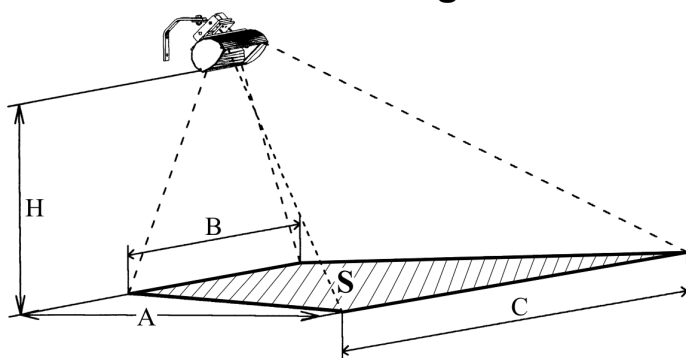

TERM2000 warmth covered areas with 45° installation angle



TERM2000 Model		Height H [m]	Warming Dimensions			
			A [m]	B [m]	C [m]	S [m ²]
	RCA 165 (1,65kW)	1,8	2,7	2,6	4,9	10,1
	RCA 020 (2 kW)	2,1	3,2	3,0	5,8	14,1
	RCB 040 (4 kW)	3,5	4,6	3,6	7,2	24,8
	RCJ 040 (4 kW)	3,5	4,1	4,3	8,4	25,4
	RCC 060 (6 kW)	4,5	5,1	4,0	8,6	32,1
	RCK 060 (6 kW)	4,5	4,4	5,4	9,8	32,6
	RCD 080 (8 kW)	5,0	5,0	4,8	9,6	36,0
	RCM 080 (8 kW)	5,0	5,8	4,2	8,9	36,7
	RCN 100 (10 kW)	5,0	7,1	4,2	9,8	49,7
	RCE 120 (12 kW)	6,0	8,0	4,6	10,8	61,6
	RCL 120 (12 kW)	6,0	5,8	6,6	13,2	57,4
	RCP 120 (12 kW)	6,0	9,5	4,3	10,1	68,4
	RCF 180 (18 kW)	6,0	8,3	6,6	13,4	83,0
	RCS 180 (18 kW)	6,0	12,0	4,4	10,2	87,6