


Datasheet

RELAX DARK IRC IP55, version 2021

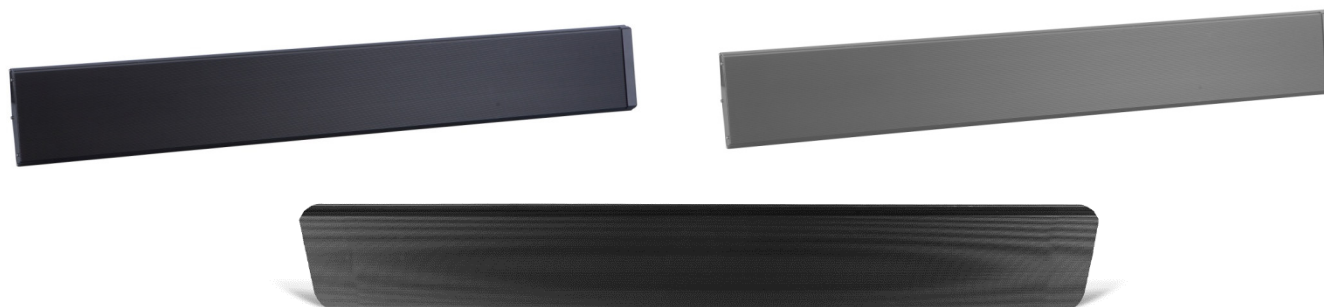

Code	Power watt	Material	Color	EAN	IP	Dimension w x h x d in cm	Weight in kg	Cable	Connection	Heat-able m ²	Mounting
BRELD2400-1	2400	Corrosion-resistance anodized aluminium	Black	4260409695573	55	158 x 20,1 x 5,8	8,1	3m, 3-wired 1,5 mm ² , no plug	220-240 V ~ 50-60 Hz	6	Wall and ceiling
BRELD2200-3	2200	Corrosion-resistance anodized aluminium	Silver	4260409695580	55	158 x 20,1 x 5,8	8,1	3m, 3-wired 1,5 mm ² , no plug	220-240 V ~ 50-60 Hz	6	Wall and ceiling
BRELD4500-1	4500	Corrosion-resistance anodized aluminium	Black	4260409696549	55	216 x 25 x 7	17,6	3m, 5-wired, 1mm ² , Connection cable bare without end sleeve	3/N/PE 380-400V ~50-60 Hz	15	Wall and ceiling